

# **ids** BUILDING

## TECHNICAL MATS AND FLOORINGS

**SPECIAL RANGE  
FOR  
PUBLIC ACCESS  
BUILDINGS**



**RUBBER  
GRATINGS**




**SCRAPER  
MATS**




**LOGO  
MATS**



**ANTI-DUST  
MATS**

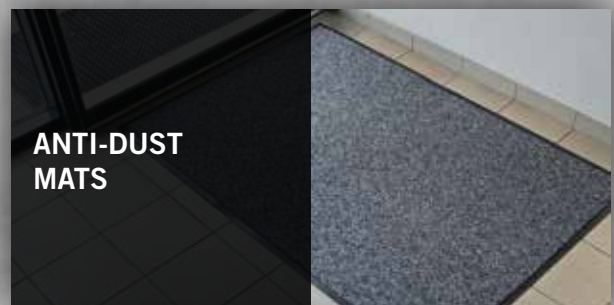

**SLABS**

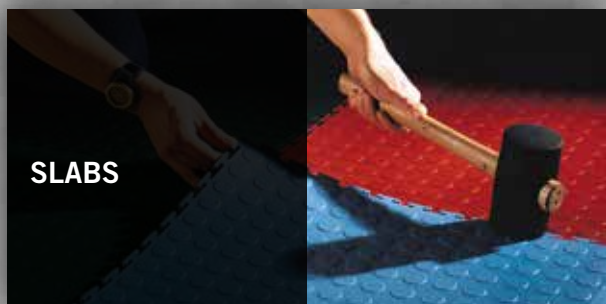

**ROLLS**



[www.ids-france.net](http://www.ids-france.net)

# The **iDS** mat: the barrier against dirt

To choose the right mat, ask yourself the right questions:

Where is the mat **LOCATED**?



Outdoor

or



Covered outdoor

or



Indoor

What is the **FUNCTION** of the mat?



Scraper

or



Absorbent and scraper

or



Absorbent

What is the traffic **INTENSITY**?



Regular traffic

or



Important traffic

or



Intense traffic

The various qualities of fibers and backing of our absorbent mats:

Excellent  
Very good  
Good

The fiber

The backing



Polyamide


Microfibers

Polypropylene

Rubber

Rubbered PVC

PVC

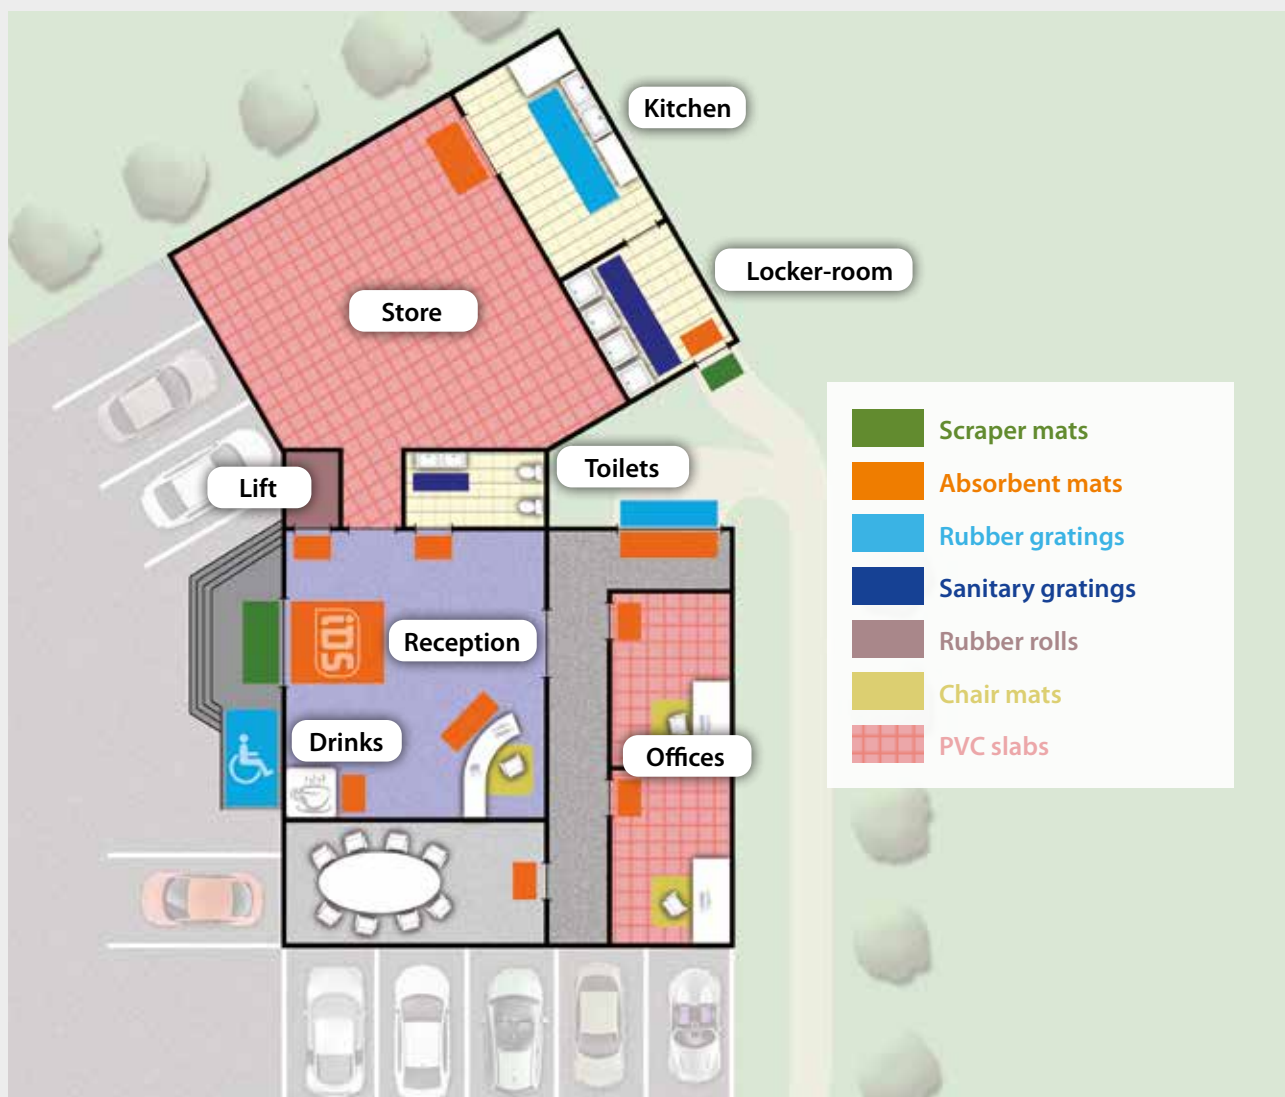

	Reference	Page number	Presentation		Use		Mat function		Environment		Fire classification
			Roll	Slab	Indoor	Outdoor	Absorbent	Scraper	Wet	Oily	
Rubber gratings	M69 / M69CFL	6		X	X	X		X	X		- / Cfl-S1
	M69PLUS / M69PLUSBFL	6		X	X	X		X	X		- / Bfl-S1
	M68/M11/M10	7		X	X	X		X	X		
	M22	8		X	X	X		X	X		
	MPR22	8		X	X	X		X	X	X	
	M24	9		X	X	X		X	X		
	MPR24	9		X	X	X		X	X	X	
	M6080BB / M80120BB	9		X	X	X		X	X		
	MB46	10		X	X	X		X	X		
	MB46PR	10		X	X	X		X	X	X	
	MB45	11		X	X	X		X	X		
	MB45PR	11		X	X	X		X	X	X	
	M69 MINI	12	X		X	X		X	X		
	MR12	13	X		X	X		X	X		
	MR12BB	13		X	X	X		X	X		
	M25 / M26	14		X	X	X		X	X		- / Cfl-S1
	M67	15		X	X	X		X	X		
Tactile guidance strips and slabs	TACTILE SLABS	16		X	X	X					Cfl-S1
	TACTILE GUIDANCE STRIPS	16		X	X	X					Cfl-S1
Scraper mats	POLYCOFLOOR / POLYCOFLOOR SUPER	17	X		X		X	X			
	COCO	18	X		X			X			- / Cfl-S1
	COMBIX	19		X	X	X		X	X		Bfl-S1
	INTEGRIX	19		X	X		X	X			Bfl-S1
	COMBI BRUSH	20		X	X	X		X			
	ASTROTURF HP	20	X	X	X	X		X	X		Efl
	STUDDER MAT	21	X	X	X	X		X	X		
	ITINERAIR	22	X	X	X	X		X	X		
Logo mats	HOUSTON	23		X	X		X				
	BOSTON	23		X	X		X				
	NEW YORK	24		X	X		X				
	BUFFALO	24		X	X	X		X			
	TAPILOGO	25		X	X		X				
	LOGO JET PRINT	26		X	X		X			X	Cfl-S1
Anti-dust mats	CLEANFOR	27		X	X		X			X	Cfl-S1 / Bfl-S1
	CONFOR	28		X	X		X			X	Cfl-S1
	SOFT	29		X	X		X				Efl
	MOISSAC	30	X	X	X		X	X			Cfl-S1
	CLEANGRAT	31		X	X		X	X		X	Cfl-S1
	MIRANDE	32		X	X		X				
	FIGEAC	33	X	X	X		X				Cfl-S1
	COMBI ABSORBANT	34		X	X		X	X			
	MICROFIBRES	34		X	X		X				
	IMPACT PRO	35		X	X		X	X			
	BELLAC	36		X	X		X	X			
	QUERCY	37	X	X	X		X				
	ABSORGRAT	38		X	X		X	X			
	BIGRAMAT	38	X	X	X		X	X			
	GRAMAT	39		X	X		X	X			
	FLORAC / CAHORS	40	X	X	X		X				
	PREMIUM	41		X	X		X	X			
Sanitary gratings	SOFT STEP NEW	42	X		X	X			X		
	CLAIÉ EHA	43	X		X	X			X		
Chair mats	CHAIR MAT	44		X	X						
Anti-contamination mats	ANTI-CONTAMINATION MAT	45		X	X						
	FOOTBATH	45		X	X	X			X		
Synthetic turfs	ASTROTURF	46	X		X	X		X	X		Efl
	GREEN	46	X		X	X			X		
	ECOLO	47	X		X	X			X		
	EXPO RED	47	X		X	X			X		Cfl-S1
Polypropylene and PVC slabs	ID UNIVERSAL	48		X	X	X			X	X	
	IDEX	49		X	X						Bfl-S1
Rubber rolls	PASTILLE / CHECKER	50	X		X						- / Cfl-S1
	FINES STRIES / CANNELE	51	X		X						
	WIDE RUBBER ROLLS	52	X		X	X					
	MANUFACTURED RUBBER	53	X		X						
	IDS RAMP	53	X		X						
Sports rubber floorings	SPORTNEIGE / IDNEIGE	54	X		X	X			X		Efl
	DELINEIGE	55	X		X	X			X		Cfl-S1
	8110	56	X		X	X			X		Efl
	CLIP SUPER	56		X	X	X			X		- / Cfl-S1 / Bfl-S1
	CLIP 18	57		X	X	X			X		Cfl-S1 / Bfl-S1 / Dfl-S2
	M75	58		X	X	X			X		Dfl-S2 / Cfl-S1
	M72	58		X	X	X			X		
	SOLID SPORT	59		X	X				X		Cfl-S1 / Bfl-S1

# Our strengths

ISO 9001:2015

**BUREAU VERITAS**  
Certification



*Management has been involved in a Quality process for over 10 years.*

After having implemented a management system that complies with the requirements of the ISO 9001 version 2015 standard, we note that this improves our service to our customers by respecting their requirements. This quality approach has also helped us to get closer to the certification or standardization institutions (such as LNE, Veritas ...), which is very positive for the sustainability of our products and our activities.

The Management reiterates its commitment provide the necessary resources to continue to improve the satisfaction of its customers and the competitiveness of the company, while ensuring respect for the safety of each and the environment.



For more information, visit  
[www.amfori.org](http://www.amfori.org)

Member of amfori, ID Group is committed to respecting the principles of open and sustainable trade (respect for the labor code, business ethics, non-use of child labor, non-discrimination, environmental protection ...) We improve the social performance of our supply chain via amfori BSCI.



## REACH REGULATION

All of our products are REACH compliant. By choosing our REACH - SVHC Free products, therefore you are not subject to the obligation to inform your customers of the content of hazardous materials.

## Pictograms



All products manufactured by our factory in France, are indicated by this logo

### Mat location



Outdoor



Covered outdoor



Indoor

### Mat function



Scraper



Absorbent and scraper



Absorbent

### Traffic intensity



Regular traffic  
500 passages / day



Important traffic  
500 to 1000 passages / day



Intense traffic  
more than 1000 passages / day

### Maintenance



Washing machine  
at 30°C



No spin cycle



Washing machine at 30°C



Washing machine at 40°C



Washing machine at 60°C



Vacuuming



Injection /  
extraction cleaning



High pressure  
washing



Water jet  
washable



Cleaning by  
single brush

### Fire classification



Bfl-S1



Cfl-S1



Cfl-S2



Dfl-S1



Dfl-S2



Efl

Contact us for more details on the fire classifications

### Product +



draining



Use up to  
-40°C



UV resistant



100%  
RUBBER



Technical sheet  
available on  
request



Product suitable  
for public access  
buildings



disabled  
standard

### Slip resistance



R9



R10



R11



Pages 6 to 15

## Rubber gratings

Pages 12 to 15

Public access  
buildings



Page 16

## Tactile guidance strips and slabs

Page 16

Public access  
buildings



Pages 17 to 22

## Scraper mats

Pages 17 to 19

Public access  
buildings



Pages 23 to 26

## Logo mats



Pages 27 to 41

## Anti-dust mats



Pages 42 and 43

## Sanitary gratings



Page 44

## Chair mats



Page 45

## Anti-contamination mats



Pages 46 and 47

## Synthetic turfs in rolls



Pages 48 and 49

## Polypropylene and PVC slabs



Pages 50 to 53

## Rubber rolls



Pages 54 to 59

## Sports rubber flooring



### The sturdy one

**Composition :**  
100 % Rubber

#### Applications :

pits, airlock, high-traffic entrance areas, garages, ski resorts, footbridges or outdoor stairs, etc.

#### Advantages :

- very efficient against dirt, mud, moisture, snow
- draining thanks to its studs on the underside
- ultra robust
- easy to clean
- non-slip R10

#### Colour :

black

+ **Info :** cutting on request for M69



M69



M69




M69 upper surface



M69 lower surface



M69PLUS upper surface

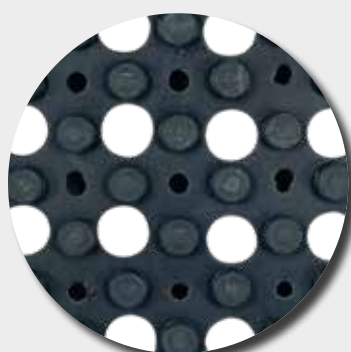

M69PLUS Lower surface



M69PLUS

Reference	Dimensions	Thickness	Weight	Fire classification
M69	100 x 150 cm	23 mm	18,0 kg/p	-
M69CFL	100 x 150 cm	23 mm	16,0 kg/p	Cfl-S1
M69PLUS	100 x 150 cm	23 mm	18,0 kg/p	-
M69PLUS-BFL	100 x 150 cm	23 mm	21,5 kg/p	Bfl-S1
C68	Junction for M69		0,03 kg/p	
BROSSEM68/M69	Brush for M69		0,04 kg/p	





# Standard rubber gratings

7

## The everlasting

**Composition :**  
100 % rubber

### Applications :

pits, airlock, high traffic entrance areas, garages, walkways or exterior stairs, access roads, ...

### Advantages :

- very efficient against dirt, mud, moisture, snow
- draining thanks to its studs on the underside
- ultra robust
- easy to clean
- non-slip

### Colour :

black

### + Info :

- cutting on request
- grating with «closed bottom» on request
- brushes colours: grey, blue, yellow, red or green




M68



Upper surface



Lower surface

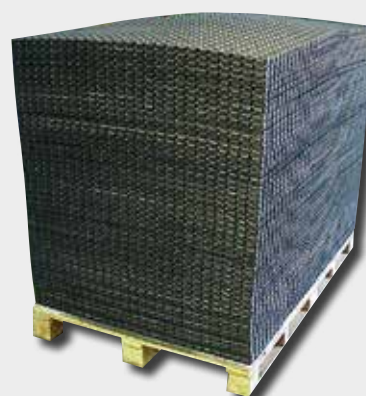


Possibility to deliver on pallet



Brushes + junctions



C68 junction

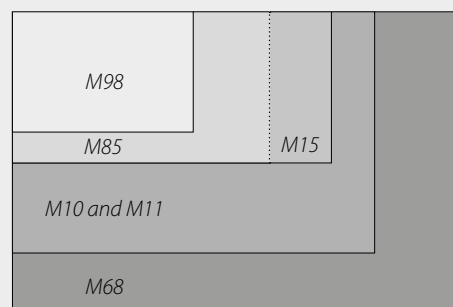

Reference	Dimensions	Thickness	Weight
M68	100 x 150 cm	23 mm	13,0 kg/p
M11	80 x 120 cm	23 mm	9,0 kg/p
M10	80 x 120 cm	17 mm	5,5 kg/p
M15	50 x 100 cm	22 mm	3,8 kg/p
M85	50 x 80 cm	22 mm	3,4 kg/p
M98	40 x 60 cm	14 mm	1,3 kg/p
C68	Junction for M68/ M11		0,03 kg/p
BROSSEM68	Brush for M68/ M11		0,04 kg/p



# M22 / MPR22 rubber gratings

## Thin rubber grating

### Composition :

100 % Natural rubber (M22 - black) or nitrile rubber (MPR22 - red\*)

### Applications :

pits, airlock, entrance areas, kitchens, bars ...

### Advantages :

- easy to clean thanks to its lightweight
- non-slip R10
- draining thanks to its studs on the underside
- very resistant
- oil & grease resistant (MPR22)

### Colours :

black (natural rubber) or red (nitrile rubber)

### + Info :

cutting on request



M22




M22



C22 Junction



Lower surface

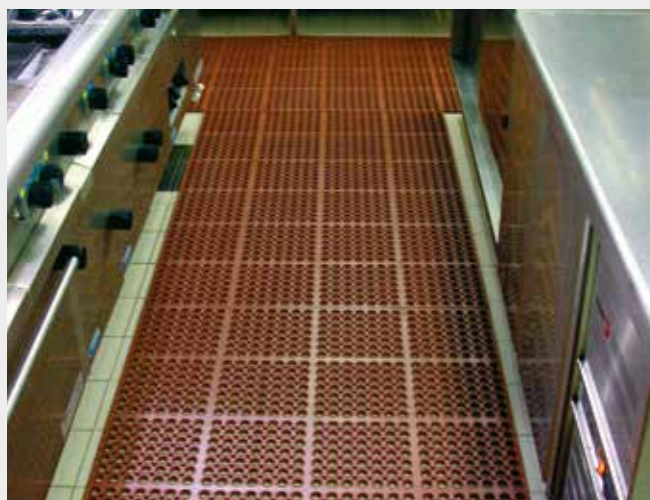

MPR22



Upper surface

Reference	Dimensions	Thickness	Weight
M22	100 x 150 cm	14 mm	14,5 kg/p
MPR22 (nitrile)	100 x 150 cm	14 mm	15,0 kg/p
C22	Junction for M22		0,02 kg/p

\* We reserve the right to deliver the nitrile quality in black



Outdoor



Scraper



>1000 passages/day



High pressure washing

R10



Draining



-40°C  
Use up to -40°C



UV resistant

100% RUBBER



# Rubber gratings with bevelled edges

9

## Lightweight rubber grating with bevelled edges

### Composition :

100 % Natural rubber (M24 - black) or nitrile rubber (MPR24 - red\*)

### Applications :

building entrance without pits, kitchens, bars ...

### Advantages :

- bevelled edges for easy access
- draining thanks to its studs on the underside
- easy to clean thanks to its lightweight
- non-slip
- oil & grease resistant (MPR24)

### Colours :

black (natural rubber) or red (nitrile rubber)



M24



M24 / MPR24




M24 Lower surface



M24 Upper surface



MPR24




M6080BB Upper surface



M6080BB Lower surface



M6080BB

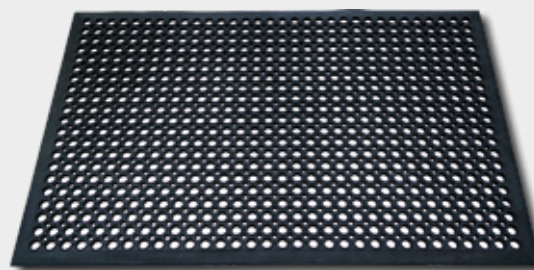

M80120BB

Reference	Dimensions	Thickness	Weight
M24	91 x 152 cm	14 mm	11,5 kg/p
MPR24 (nitrile)	91 x 152 cm	14 mm	12,0 kg/p
M6080BB	60 x 80 cm	13 mm	3,5 kg/p
M80120BB	80 x 120 cm	14 mm	7,55 kg/p

\* We reserve the right to deliver the nitrile quality in black



## 100 % modular slabs

### Composition :

100 % Natural rubber (MB46 - black) or nitrile rubber (MB46PR - red\*)  
possibility to manufacture various rubber quality on request: contact us

### Applications :

kitchens, bars, walkways or outside stairs

### Advantages :

- 100 % modular slab thanks to its unique connection system
- easy to clean thanks to its lightweight
- easy to transport, install and relocate
- thermal insulation
- marking of safety zones thanks to yellow corners and edges (Y)
- non-slip R9
- oil & grease resistant (MB46PR)
- self-weighted

### Colours :

black (natural rubber) or red (nitrile rubber)




MB46




Upper surface



Lower surface

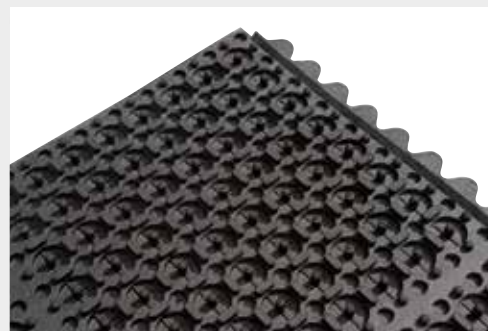

Lower surface connections

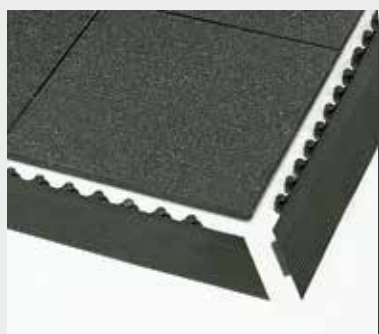

Ramp



MB46

MB46PR

Reference	Dimensions	Thickness	Weight
MB46	91 x 91 cm	14,5 mm	9,1 kg/p
MB46PR (nitrile)	91 x 91 cm	14,5 mm	9,4 kg/p
BRA45N/BRA45PRN/BRAY45N	Black / red / yellow ramp Ramp width: 6.5 cm (sketch page 11)		0,85 kg/p
* We reserve the right to deliver the nitrile quality in black			





## 100 % modular grating

### Composition :

100 % **Natural rubber** (MB45 - black) or **nitrile rubber** (MB45PR - red\*)

*possibility to manufacture various rubber quality on request: contact us*

### Applications :

airlock, entrances with or without pits, kitchens, bars ...

### Advantages :

- 100 % modular grating thanks to its unique connection system
- thin and economical grating
- excellent drainage and ventilation
- easy to clean thanks to its lightweight
- easy to transport, install and relocate
- marking of safety zones thanks to yellow corners and edges (Y)
- non-slip
- oil & grease resistant (MB45PR)

### Colours :

black (natural rubber) or red (nitrile rubber)





Upper surface




Lower surface



MB45

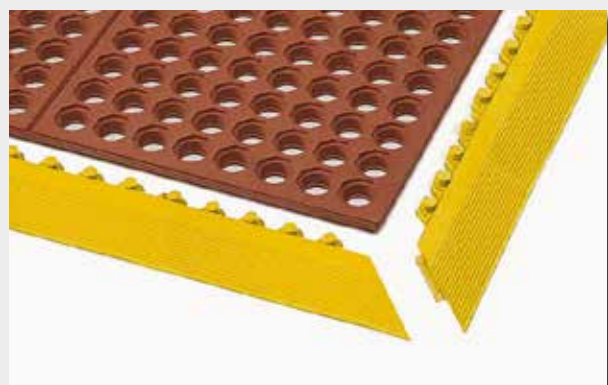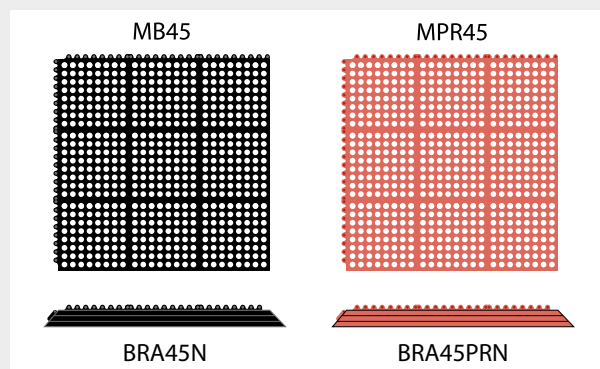

MB45PR + ramp

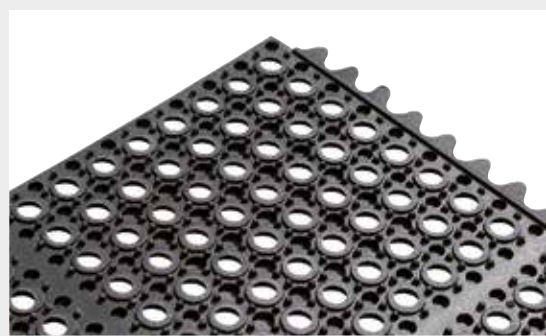

Lower surface connections

Reference	Dimensions	Thickness	Weight
MB45	91 x 91 cm	14,5 mm	6,5 kg/p
MB45PR (nitrile)	91 x 91 cm	14,5 mm	6,7 kg/p
BRA45N/BRA45PRN/BRA45N	Black / red / yellow Ramp width: 6.5 cm		0,85 kg/p

\* We reserve the right to deliver the nitrile quality in black



# M69 Mini rubber gratings

Public  
access  
buildings

## Heavy duty rubber grating in roll

### Composition :

100 % Natural rubber

**Applications :** outdoor walkways or stairs, floor protection, access roads ...


### Advantages :

- rubber grating in roll
- compliant with the disabled standard LOGC940024A «holes or slots in the ground must be under 2 cm in diameter»
- draining thanks to its studs on the underside
- non-slip R9
- very resistant to abrasion
- very good value for money
- light, easy to set up
- roll presentation for convenient installation
- possibility to fix the ends of the roll using a threshold bar




**Colour :** black

**+ Info :** cutting on request

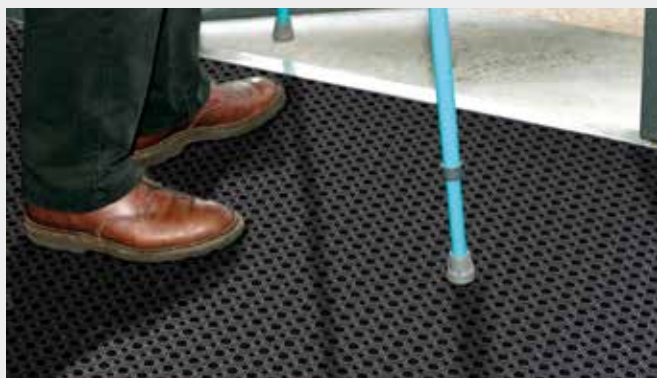

compliant with the disabled  
standard LOGC940024A

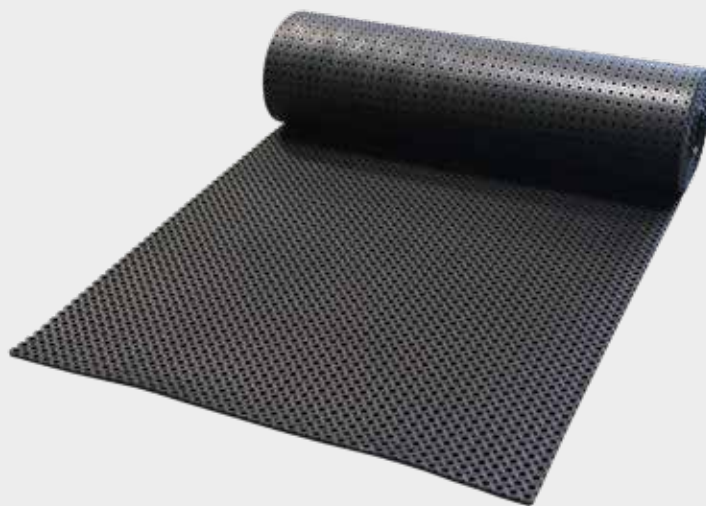

Upper surface



Lower surface

Reference	Dimensions	Thickness	Weight
M69 Mini	1 x 10,0 m	10 mm	7,3 kg/m <sup>2</sup>





# MR12 rubber grating

13

Public  
access  
buildings

## Rubber grating in roll

**Composition :**  
100 % rubber

**Applications :** outdoor walkways or stairs, floor protection, access roads ...

### Advantages :

- rubber grating in roll
- compliant with the disabled standard LOGC940024A «holes or slots in the ground must be under 2 cm in diameter»
- draining thanks to its studs on the underside
- non-slip R9
- very good value for money
- very light, easy to set up
- roll presentation for convenient installation
- possibility to fix the ends of the roll using a threshold bar

**Colour :** black

**+ Info :** cutting on request

Reference	Dimensions	Thickness	Weight
MR12RL60	0,60 x 10,0 m	10 mm	7,85 kg/m <sup>2</sup>
MR12RL91	0,91 x 10,0 m	10 mm	7,85 kg/m <sup>2</sup>
MR12	1,83 x 10,0 m	10 mm	7,85 kg/m <sup>2</sup>



Rubber gratings

## MR12 bevelled edges

### Rubber grating with bevelled edges compliant with «disabled» standard

**Composition :**  
100 % rubber

**Applications :** supermarkets, hospitals, hotels, high schools, wet environments etc.

### Advantages :

- compliant with the «disabled persons» standard LOGC9400024A «the holes or slots in the ground must have a diameter smaller than 2 cm»
- bevelled edges allowing easy access for shopping carts and / or wheelchairs, and reduce the risk of falling
- highly resistant, ideal for high traffic
- non-slip and draining thanks to its suction cups it makes it possible to secure the slippery areas
- rot-proof and UV resistant, it can be used indoors and outdoors
- very thin; light and easy to install

**Colours :** black - Other colours on request

Reference	Dimensions	Thickness	Weight
MR12BB90150	90 x 150 cm	10 mm	11,5 kg/p
MR12BB120180	120 x 180 cm	10 mm	19,0 kg/p



## Sturdy rubber grating compliant with «disabled» standard

**Composition :**  
100 % rubber

### Applications :

entrances of public buildings, footbridges or external staircases, pits, locks, ski resorts, ...

### Advantages :

- compliant with the disabled standard LOGC940024A «holes or slots in the ground must be under 2 cm in diameter»
- antislip surface
- bevelled edges for easy access
- draining thanks to its pinned backing
- self-weighted slabs that ensure perfect ground adhesion
- very robust thanks to its density
- non-slip R10




M26

### Colour :

black

### + Info :

cutting on request



Upper surface  
Holes ø : 19 mm




Lower surface




M26 + brushes



C26 junction



M25 / M26 :  
straight edges



M26.06 :  
bevelled edges



Reference	Dimensions	Thickness	Weight	Fire classification
M25	100 x 150 cm	22 mm	21,0 kg/p	-
M25CFL	100 x 150 cm	22 mm	21,3 kg/p	Cfl-S1
M2601*	91 x 152 cm	22 mm	20,0 kg/p	-
M2601CFL*	91 x 152 cm	22 mm	21,5 kg/p	Cfl-S1
M2606	98 x 157 cm	22 mm	21,0 kg/p	-
C26	Junction for M25 et 26		0,02 kg/p	-
BROSSEM26CC	Brush for M25 and M26			-

\* Upon request





## Rubber grating compliant with «disabled» standard

**Composition :**  
100 % rubber

### Applications :

public buildings entrance, footbridges or external staircases, pits, locks, ski resorts, ...

### Advantages :

- compliant with the «disabled person» standard LOGC9400024A «the holes or slots in the ground must have a diameter smaller than 2 cm»
- very efficient against dirt, mud, moisture, snow
- draining thanks to its pinned backing
- non-slip R10
- easy to clean
- self-weighted




### Colour :

black




M67

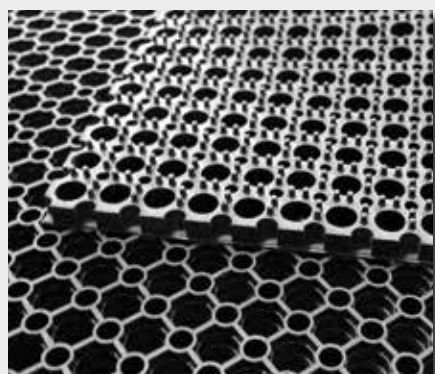

Lower surface



Upper surface

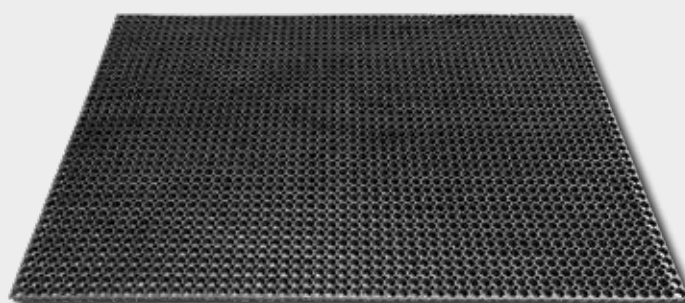

Outdoor



Scraper



>1000 passages/day  
Intense traffic



High pressure washing



Water jet washable



Draining



-40°C  
Use up to -40°C



UV resistant



100% RUBBER



Public Access Building

Reference	Dimensions	Thickness	Weight
M67	100 x 150 cm	23 mm	13,5 kg/p

# RUBBER TACTILE SLABS

Public  
access  
buildings

Tactile guidance strips and slabs

## To warn visually impaired or blind persons and signal a danger

**Composition :**  
100 % rubber

**Applications :** To lay 50 cm ahead from danger, obstacle or level change: stairs, lifts, pedestrian crossings, platform edges ...



### Advantages :

- warn the visually impaired of a danger
- easy and quick installation
- non-slip
- compliant with NF P 98-351 standard
- february 2005 «disabled persons» standard
- indoor or outdoor installation
- fabric impression on the lower surface for easy gluing

**Laying :** Degrease the underside. Glued with two-component polyurethane glue (page 59)

**Colours :** black, grey, yellow, or white

**+ Info :** wear indicator

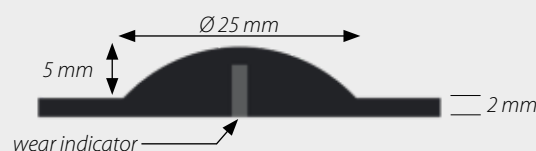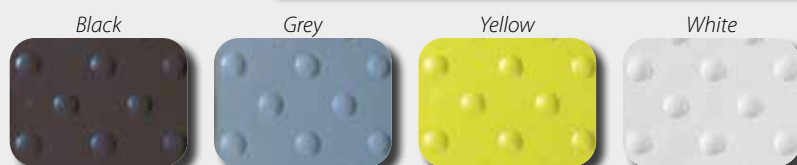

Outdoor



Water jet washable



Use up to -40°C



UV resistant



100% RUBBER



Public Access Building

Reference	Dimensions	Thickness	Weight
PODOCFL4280	42 x 80 cm	7 mm	1,2 kg/p

# TACTILE GUIDANCE STRIPS

## To guide blind or visually impaired persons

**Composition :**  
100 % rubber


**Applications :** to place on roads or in public areas far from dangerous situations (pedestrian crossings, complex crossroads, roundabouts, obstacles, dangers ...)

### Advantages :


- discreet and effective guide that indicates the direction to follow
- reassures blind and visually impaired persons
- compliant with NF P 98-352 standard
- thanks to the contrast of texture and color, the visually impaired person can detect the change of relief with his cane or directly under his sole
- non-slip

**Laying :** degrease the underside and roughen by sanding.  
Glued with polyurethane glue (page 59)


**Colours :** black, or white or grey on request

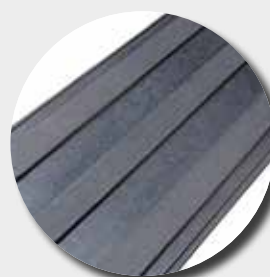


BAO17100EP7



BAO22100EP8



BAO22100EP5



Reference	Dimensions	Thickness	Public Access Buildings
BAOCFL17100EP7	17 x 100 cm	7 mm	1 - 2 (double rail installation)
BAOCFL22100EP8	22 x 100 cm	8 mm	1 - 2 (single rail installation)
BAOCFL22100EP5	22 x 100 cm	5 mm	3 - 5 (single rail installation)



Cfl-S1



Outdoor



Water jet washable



Use up to -40°C



UV resistant



100% RUBBER



Public Access Building



## Very resistant and efficient coir like mat

### Composition :

needled polypropylene fibers on recycled rubber backing

### Applications :

scraper and absorbent mat for regular or high traffic. For pit use only.

### Advantages :

- self-weighted
- high resistance to high traffic
- more durable than coir mat
- holds and conceals dirt with needled fibers
- do not plush
- easy cutting

**Colours :** natural or black

**+ Info :** cutting on request




recycled rubber backing



Public access buildings



Natural



Black

Reference	Dimensions	Thickness	Weight	Colours
POLYCORN120EP16MM	1,0 x 15,0 m*	11 mm	4,07 kg/m <sup>2</sup>	natural
POLYCORN220EP16MM	2,0 x 20,0 m*	11 mm	4,07 kg/m <sup>2</sup>	natural
POLYCORN115EP16	1,0 x 15,0 m*	11 mm	4,07 kg/m <sup>2</sup>	black

Possibility of supplying underlay (page 18)

\* length may vary upon production



Scraper mats

# POLYCOFLOOR

## Lighter and more efficient than traditional coir mat

### Composition :

needled polypropylene fibers on closed cell foam backing

**Applications :** scraper and absorbent entrance mats for pits for regular or intense traffic. For pit use only.

### Advantages :


- high resistance to intense traffic
- easy to install thanks to its lightweight
- easy cutting
- holds and conceals dirt with needled fibers
- do not plush

**Colours :** natural or anthracite grey

**+ Info :** cutting on request



Anthracite grey

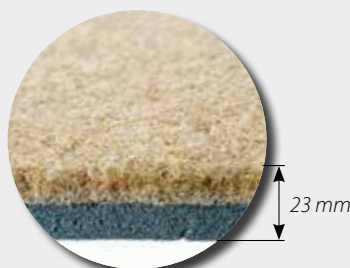

23 mm



Reference	Dimensions	Thickness	Weight
POLYCORN115EP23MM	1,0 x 15,0 m*	20 - 23 mm	2,0 kg/m <sup>2</sup>
POLYCORN215EP23MM	2,0 x 15,0 m*	20 - 23 mm	2,0 kg/m <sup>2</sup>
POLYCORN1MEP20MM02	1,0 x 15,0 m*	20 - 23 mm	1,75 kg/m <sup>2</sup>
POLYCORN2MEP20MM02	2,0 x 15,0 m*	20 - 23 mm	1,75 kg/m <sup>2</sup>

Possibility of supplying underlay (page 18) \*variable length according to production



## The natural way to clean shoes

**Composition :**

natural coir fibers on PVC backing

**Applications :**

scraper mat for indoor pits

**Advantages :**

- very resistant
- easy cutting
- biodegradable fibers
- preserve the environment
- suitable for pits

**Colour :** natural**+ Info :**

- cutting on request
- contact us for other widths



Reference	Dimensions	Thickness	Weight	Fire classification
COCORLN1P17MM6M	1,0 x 6,0 m	17 mm	6,3 kg/m <sup>2</sup>	-
COCORLN1P17MM	1,0 x 12,0 m	17 mm	6,3 kg/m <sup>2</sup>	-
COCORLN2P17MM	2,0 x 12,0 m	17 mm	6,3 kg/m <sup>2</sup>	-
COCORLNCFL2P17MM	2,0 x 12,0 m	17 mm	6,3 kg/m <sup>2</sup>	Cfl - S1
COCORLN1P23MM	1,0 x 12,0 m	23 mm	7,3 kg/m <sup>2</sup>	-
COCORLN2P23MM	2,0 x 12,0 m	23 mm	7,3 kg/m <sup>2</sup>	-
COCORLNCFL2P23MM	2,0 x 12,0 m	23 mm	7,3 kg/m <sup>2</sup>	Cfl - S1

Possibility of supplying underlay

Covered  
outdoor

Indoor



Scraper

500 to 1000  
passages/day  
Important  
traffic

Vacuuming

Public  
Access  
Building

## Underlay



- to compensate for the thickness of very deep pits
- dimensions : 2,08 x 64,0 m
- thickness: 5 mm
- cutting on request

Underlay



## The performance of modular slabs

**Composition :**  
100 % PVC


**Applications :** modular slab carpets for heavy traffic: shopping malls, hospitals, high schools ...

### Advantages :

- easy installation
- can be associated with INTEGRIX slabs
- drainage of particles in the pit
- suitable for indoor or outdoor installation
- invisible connections for a seamless appearance
- non-slip: R10 according to DIN 51130
- temperature resistant from -20 ° C to +70 ° C

**Colour :** grey

Reference	Dimensions	Thickness	Weight
COMBIX16	39 x 13 cm	16 mm	0,55 kg/p
Possibility of supplying underlay (page 18)			

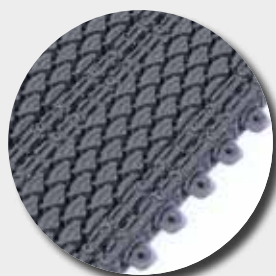


Upper surface



Lower surface



Connection between slabs



Draining



UV resistant



Public Access Building



Bfl-S1



R10



Outdoor



Scraper



>1000 passages/day Intense traffic



Vacuuming



Public access buildings

Scraper mats

# INTEGRIX

## The 2 in 1 modular slab

**Composition :**  
100 % PVC with carpet strips made of mono and multi-filament 100% polyamide

**Applications :** modular slab carpets for heavy traffic: shopping malls, hospitals, high schools ...

### Advantages :

- easy installation
- can be associated with COMBIX slabs
- drainage of particles in the pit
- ultra resistant
- very high absorption capacity thanks to polyamide carpet strips
- invisible connections for a seamless appearance
- non-slip: R11 according to DIN 51130
- temperature resistant from -20 ° C to +70 ° C

**Colours :** grey with anthracite carpet stripes



Connection between slabs

Anthracite



Scaping and absorbent slabs



Indoor



Absorbent and scraper



>1000 passages/day Intense traffic



Vacuuming



R11



Injection / extraction cleaning



Bfl-S1



UV resistant



Public Access Building

Reference	Dimensions	Thickness	Weight
INTEGRIX16	39 x 13 cm	16 mm	0,56 kg/p
Possibility of supplying underlay (page 18)			

## The professional scraper mat

### Composition :

rubber mat with scraper strips made of polypropylene fibers

### Applications :

Mat for intense traffic: public entrances, restaurants, hotels, schools, businesses ...

### Advantages :

- ultra-resistant mat thanks to its rubber backing
- very scraper
- professional product
- high resistance to high traffic
- self-weighted thanks to its non-slip backing

### Colours :


grey, brown, and black




Grey



Brown



Black



scraper polypropylene strips

Reference	Dimensions	Thickness	Weight
COMBIBRUSH4575	45 x 75 cm	7 mm	1,2 kg/p
COMBIBRUSH6090	60 x 90 cm	7 mm	1,9 kg/p
COMBIBRUSH80120	80 x 120 cm	7 mm	3,5 kg/p
COMBIBRUSH90150	90 x 150 cm	7 mm	4,8 kg/p



Covered outdoor



Scraper



>1000 passages/day  
Intense traffic



Vacuuming

## ASTROTURF HP

### ultra robust and efficient scraper mat

### Composition :

100 % polyethylene

### Applications :

mat for intense traffic: public entrances, restaurants, hotels, schools, businesses ...

### Advantages :

- very resistant: ideal for outdoors for all types of climates
- UV resistant
- 100 % recyclable
- easy to clean
- always keeps a clean look
- hygienic
- non-slip backing

### Colours :

grey

### + Info :

- contact us for border system



Reference	Dimensions	Thickness	Weight
ASTROTURFHPRL02	0,91 x 16,0 m	17,5 – 20,5	3,0 – 3,3 kg/m <sup>2</sup>



Outdoor



Scraper



>1000 passages/day  
Intense traffic



Water jet washable



Efl



UV resistant



## High-performance self-cleaning mat

### Composition :

100 % natural rubber

### Applications :

outdoor scraper mat for all kind of entrances with or without pit

### Advantages :


- resistant to frost and cold
- flexible, rough studs that remove dirt from shoes soles
- all year efficiency, both winter and summer
- perfect floor adherence
- bevelled edges for an entrance without pit

### Colour :

black



M51



bevelled edges



Reference	Dimensions	Thickness	Weight
Standard dimension pinned mat with bevelled edges			
M2	35,5 x 53 cm	12 mm	0,9 kg/p
M42	45 x 75 cm	12 mm	1,72 kg/p
M51	60 x 80 cm	16 mm	6,0 kg/p
M51_L	60 x 80 cm	12 mm	3,2 kg/p
M52	80 x 100 cm	16 mm	11,0 kg/p
M52_L	80 x 100 cm	12 mm	6,0 kg/p
M53	90 x 180 cm	16 mm	22,0 kg/p
M53_L	90 x 180 cm	12 mm	13,0 kg/p
Pinned mat in roll			
M54	1,0 x 8,0 m	16 mm	13,5 kg/m <sup>2</sup>
M56	1,0 x 10,0 m	11 mm	7,0 kg/m <sup>2</sup>



Outdoor



Scraper



>1000 passages/day  
Intense traffic for 16mm thickness



High pressure washing



UV resistant



100% RUBBER

## 3 in 1 Professional mat against dirt

### Composition :

100 % non-peelable vinyl fibers, heat-plastified

### Applications :


mat for regular and intense traffic: entrances, halls, corridors, airlocks, lifts, water features, boat decks ...

### Advantages :

- full efficiency
- rot-proof, fungicide
- very resistant to low and high temperatures
- the mat always keeps a clean appearance
- non-slip backing

### Colours :

grey or blue

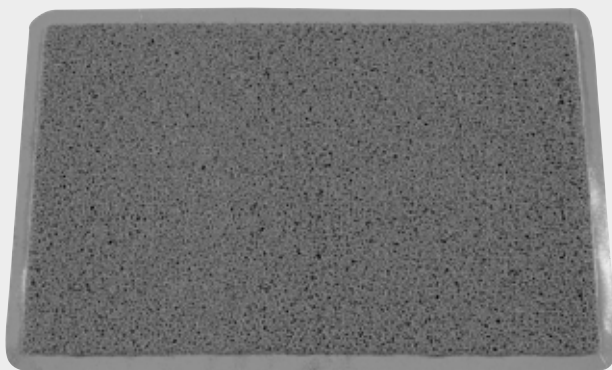

Open mesh

Blue



Light grey



Plain underlay  
(only in 10mm)

Reference	Dimensions	Thickness	Backing	Weigth	Colours
ITINERAIR in standard dimensions with bevelled edges:					
ITBB406002	40 x 60 cm	10 mm	Underlay	0,6 kg/p	Grey
ITBB608002	60 x 80 cm	10 mm	Underlay	1,2 kg/p	Grey
ITBB9015002	90 x 150 cm	10 mm	Underlay	3,4 kg/p	Grey
ITINERAIR in roll					
ITRL122EP14MM	1,22 x 9,14 m	14 mm	Open backing	5,73 kg/ml	Grey
ITRL122EP10MMT	1,22 x 9,14 m	10 mm	Underlay	3,90 kg/ml	Grey or blue
ITRL122EP15MM*	1,22 x 12 m	15 mm	Open backing	4,6 kg/ml	Grey
ITRL61EP12MM*	0,61 x 12 m	12 mm	Open backing	1,83 kg/ml	Blue

\* While stocks last



Outdoor



Scraper



Intense traffic  
>1000 passages/day



Water jet  
washable



Draining



UV resistant



## The advertising mat

### Composition :

100% non woven polyester fibers on PVC backing  
Pile weight: 300 g/m<sup>2</sup>



### Applications :

advertising mat for all of your communications (exhibitions, commercial events, etc.) or as marketing support

### Advantages :

- ideal for reproducing your logos and / or photos
- faithful reproduction of all colors thanks to a unique printing process
- reproduction of your photos, images or inscription with impressive precision
- colours don't fade over time
- transfer printing of mats thanks to a sublimation press

### + Info :

custom made dimension on request : contact us



Reference	Dimensions	Weight
HOUSTON1922	19 x 22 cm	0,10 kg/p
HOUSTON2242	22 x 42 cm	0,23 kg/p
HOUSTON4060	40 x 60 cm	0,59 kg/p
HOUSTON5050	50 x 50 cm	0,61 kg/p
HOUSTON5080	50 x 80 cm	0,98 kg/p
HOUSTON6666	66 x 66 cm	1,07 kg/p
HOUSTON40120	40 x 120 cm	1,18 kg/p
HOUSTON50100	50 x 100 cm	1,22 kg/p
HOUSTON50120	50 x 120 cm	1,47 kg/p
HOUSTON67120	67 x 120 cm	1,97 kg/p
HOUSTON80120	80 x 120 cm	2,35 kg/p
HOUSTON95185	95 x 185 cm	4,30 kg/p
Custom dimensions: max 135 x 185 cm		

## BOSTON



Regular traffic



## Event mat

### Composition :

100 % polyamide fibers on PVC backing without border.


### Applications : event mats for regular traffic.

### Advantages :

- ideal for reproducing your logos and / or photos
- faithful reproduction of all colors thanks to a unique printing process
- photographic print quality
- colours don't fade over time
- printing of mats by transfer thanks to a sublimation press

### + Info : custom made dimension on request : contact us

Reference	Dimensions	Weight
BOSTON1922	19 x 22 cm	0,10 kg/p
BOSTON2242	22 x 42 cm	0,23 kg/p
BOSTON4060	40 x 60 cm	0,59 kg/p
BOSTON5050	50 x 50 cm	0,62 kg/p
BOSTON6666	66 x 66 cm	1,07 kg/p
BOSTON5080	50 x 80 cm	0,99 kg/p
BOSTON67120	67 x 120 cm	1,98 kg/p
BOSTON95185	95 x 185 cm	4,34 kg/p
Custom dimensions: maxi 135 x 185 cm		

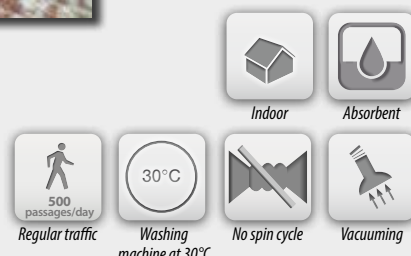

## NEW YORK



Regular traffic




## The anti-dust mat for events

## Composition :

100 % polyamide fibers on PVC backing

Pile weight: 400g/m<sup>2</sup>



PVC backing



Polyamide fibers



## Applications :

event mats for regular traffic

## Advantages :

- ideal for reproducing your logos and / or photos
- faithful reproduction of all colors thanks to a unique printing process
- ideal as event or advertising carpet
- colors don't fade over time
- transfer printing of mats thanks to a sublimation press

Reference	Dimensions	Weight
NEWYORK4060	40 x 60 cm	0,75 kg/p
NEW YORK6080	60 x 80 cm	1,40 kg/p
NEW YORK80120	80 x 120 cm	2,81 kg/p
NEW YORK90150	90 x 150 cm	4,20 kg/p



Indoor



Absorbent



Regular traffic



Washing machine at 30°C



No spin cycle



Vacuuming

## BUFFALO



Intense traffic

## Customized scraper mat

## Composition :

100% scraping nylon fibers  
on nitrile rubber foam backing

**Applications :** high durability outdoor scratching mat for all public establishments, industrial and commercial buildings, etc.


## Advantages :

- scraping fibers
- long-lasting color retention thanks to deep ink projection into the fibers (Jet Print)
- extremely robust and efficient
- outdoor use
- allows rapid evacuation of water thanks to its perforated sole (made to measure only)

## + Info :

Smooth or perforated sole with studs

Custom dimensions on request : contact us



FIBER



BACKING



Outdoor



Scraper



Intense traffic

Water jet  
Cleaning

Reference	Dimensions	Weight
BUFFALO6085	60 x 85 cm	2,00 kg/p
BUFFALO85120	85 x 120 cm	4,00 kg/p
BUFFALO85150	85 x 150 cm	5,00 kg/p
BUFFALO115180	115 x 180 cm	8,00 kg/p
BUFFALO115200	115 x 200 cm	9,00 kg/p
BUFFALO115240	115 x 240 cm	10,80 kg/p
BUFFALO150240	150 x 240 cm	14,00 kg/p
Custom dimensions: max width 140 cm (without edges)		



## The professional customizable mat

### Composition :

100 % Nylon 6.6 polyamide fibers  
on non-slip nitrile rubber backing  
Pile weight: 680g/m<sup>2</sup>



### Applications :

high-durability mat for strategic locations such as entrances, public buildings, industrial and commercial buildings, in front of vending machines, etc.

### Advantages :


- long-lasting color retention thanks to deep ink projection into the fibers (Jet Print)
- extremely robust and efficient
- washing machine
- smooth backing
- very durable nitrile rubber border and backing
- prolongs the floor lifespan
- reduces the cleaning frequency
- easy passage for wheelchairs and mobility impaired persons
- possibility to create your Jet Print TAPILOGO with 16 different colors per mat

### Colours :


see color chart

### + Info :

For optimal quality, send us a vector file (format AI, EPS, PDF or SVG) CMYK. Otherwise, send us a high definition JPG file.



Landscape



Portrait




BLACK



9-MEDIUM GREY



3-BRIGHT GREY



482-BEIGE WHITE



465-BEIGE



410-TAUPE GREY



1685-BROWN



102-BRIGHT YELLOW



116-GOLDEN YELLOW



144-BRIGHT ORANGE



1665-ORANGE



185-RED



193-CARMIN RED



505-BURGUNDY RED



224-PINK



257-MINERAL PINK



259-PURPLE



279-BLUE



286-KLEIN BLUE



281-NAVY BLUE



3015-DUCK BLUE



362-GREEN



3308-DARK GREEN



Standard dimensions (with borders)		
Reference	Dimensions	Weight
TAPILOGO4060	40 x 60 cm	0,5 kg/p
TAPILOGO6080	60 x 80 cm	1,0 kg/p
TAPILOGO85120	85 x 120 cm	2,3 kg/p
TAPILOGO85150	85 x 150 cm	3,0 kg/p
TAPILOGO115175	115 x 175 cm	4,9 kg/p
TAPILOGO115200	115 x 200 cm	5,5 kg/p
TAPILOGO115240	115 x 240 cm	7,0 kg/p
TAPILOGO150240	150 x 240 cm	9,2 kg/p
Custom dimensions (with borders)		
TAPILOGOSMEASUREAB	150 x 300 cm (maxi)	2,5 kg/m <sup>2</sup>



Washing machine at 40°C



>1000  
passages/day  
Intense traffic

## Combine branding and cleanliness

### Composition :

100 % twisted **polyamide** fibers  
on 100 % non-slip **nitrile rubber** backing  
Pile weight: 780g/m<sup>2</sup>



FIBER



BACKING


**Applications :** high-durability doormat for strategic locations such as entrances, all public establishments, industrial and commercial buildings, in front of vending machines, ...

### Advantages :


- guaranteed color retention thanks to deep ink projection
- extremely robust and efficient
- suitable for industrial washing machine
- 2 types of backings: **smooth** sole for hard floors or **rubber studs** (max dimensions: 150 x 400 cm) for carpet
- reinforced borders treated to eliminate any risk of curling
- prolongs floor lifespan
- reduces cleaning frequency
- possibility to create your Jet Print Logo mat with 20 different colours per mat

**Colours :** see colour chart


+ **Info :** For optimal quality, send us a vector file (format AI, EPS, PDF or SVG) CMYK.



Landscape



Portrait

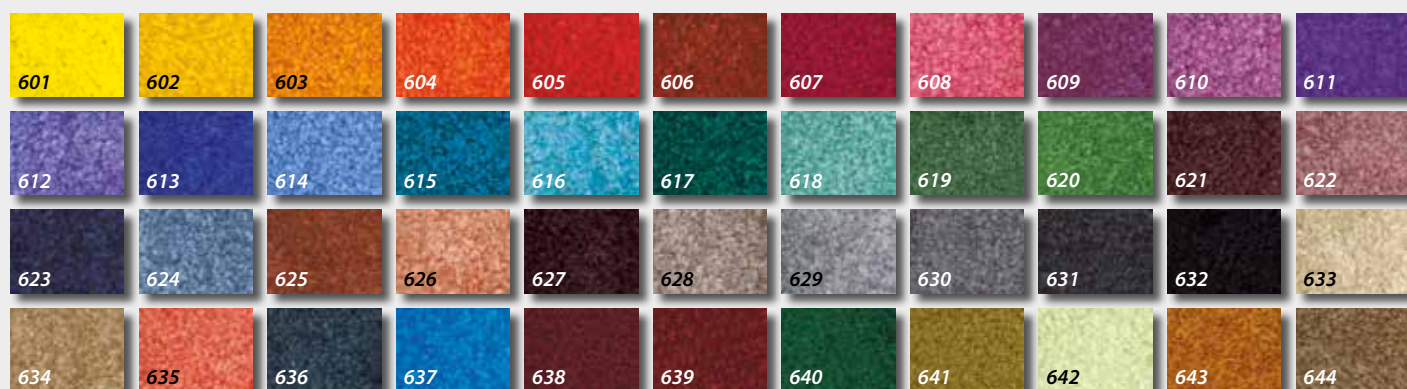

Discover all the colours available on our specific documentation

Standard widths	Standard lengths	Custom length	Weight
60 cm, 75 cm, 85 cm, 115 cm, 150 cm, 200 cm	All lengths up to 400 cm	From 400 to 700 cm	2,6 kg/m <sup>2</sup>
Possibility of supplying underlay (page 18)			



Indoor



Absorbent



Intense traffic



Washing machine  
at 60°C



Vacuuming



Injection /  
extraction cleaning



Cfl-S1



Technical  
sheet



## The professional mat

### Composition :

100 % **polyamide** fibers  
on 100 % **nitrile rubber** backing  
Pile weight : 800 g/m<sup>2</sup>



**Applications :** high-durability doormat for strategic locations such as entrances, all public establishments, industrial and commercial buildings, in front of vending machines, ...

### Advantages :

- extremely robust and efficient
- non-slip backing that ensures the safety of the passage
- reinforced borders treated to eliminate any risk of curling
- 2 types of backings: **smooth** backing for hard floors or **rubber studs** for carpet
- excellent resistance to oils and microbes
- prolongs floor lifespan
- reduces cleaning frequency
- wide choice of colours
- suitable for industrial washing machine
- easy passage for wheelchairs and mobility impaired persons

**Colours :** see colour chart



### Monotone colours



### Speckled colours



Monotone colours - standard dimensions (with borders)				
Standard widths	Standard lengths	Custom lengths	Thickness	Weight
85cm, 115 cm, 150 cm	All lengths up to 400 cm	From 400 to 600 cm	11 mm	2,6 kg/m <sup>2</sup>
Possibility of supplying underlay (page 18) Max dimensions for studded backing: 150 x 400 cm				

Speckled colours - standard dimensions (with borders)				
Width	Length	Colours	Thickness	Weight
85 cm	60 cm, 75 cm, 115 cm, 150 cm, 300 cm	All colours	10 mm	2,7 kg/m <sup>2</sup>
115 cm	180 cm, 200 cm, 240 cm, 250 cm, 300 cm		10 mm	2,7 kg/m <sup>2</sup>
150 cm	200 cm, 240 cm, 250 cm, 300 cm	All colours except Royal Blue / red	10 mm	2,7 kg/m <sup>2</sup>
200 cm	200 cm, 300 cm	050, 646	10 mm	2,7 kg/m <sup>2</sup>
Custom dimensions:				
All widths up to 150 cm	All lengths up to 550 cm	All colours	10 mm	2,7 kg/m <sup>2</sup>
All widths up to 200 cm	All lengths up to 550 cm	050, 646	10 mm	2,7 kg/m <sup>2</sup>
Possibility of supplying underlay (page 18) Max dimensions for studded backing: 175 x 550 cm				

## The N°1 for high performance

### Composition :

100 % twisted **polyamide** fibers on 100 % **nitrile rubber** backing with non-slip studs  
Pile weight: 800 g/m<sup>2</sup>



FIBER



BACKING






### Applications :

all high traffic areas: corridors, entrances, meeting rooms, elevators, landings, halls, ...


### Advantages :

- very long durability
- very absorbent fibers
- effective over time
- perfect adherence on all types of floors (tiles, carpet, wood floor...) thank to its unique backing
- the mat does not slip thanks to the anti-slip studs
- hygienic
- rot-proof
- washing machine at 40°C

**Colours :** grey, beige, red, taupe, or black



Polyamide fibers



studded backing

Reference	Dimensions	Thickness	Weight
C4060	40 x 60 cm	10 mm	0,6 kg/p
C6080	60 x 80 cm	10 mm	1,1 kg/p
C90140	90 x 140 cm	10 mm	2,7 kg/p
C120180	120 x 180 cm	10 mm	5,2 kg/p
C120240	120 x 240 cm	10 mm	6,9 kg/p



Indoor



Absorbent

>1000  
passages/day40°C  
Washing  
machine at 40°C

Vacuuming

Injection /  
extraction cleaning

Cfl-S1

Technical  
sheet



## Ultra absorbent mat with velvet look

### Composition :

100% polyester fibers on vinyl backing  
Pile weight: 1150 g/m<sup>2</sup>

### Applications :

all high traffic areas: corridors, entrances, meeting rooms, elevators, landings, halls, ...

### Advantages :

- very long durability
- very absorbent fibers
- effective over time
- non-slip backing
- hygienic
- rot-proof
- washing machine at 30°C

### Colours :

beige, blue, grey and red



Beige




Blue



Grey



Red



Washing machine at 30°C



Reference	Dimensions	Thickness	Weight
SOFT4060	40 x 60 cm	5,5 mm	0,8 kg/p
SOFT6080	60 x 80 cm	5,5 mm	1,6 kg/p
SOFT90150	90 x 150 cm	5,5 mm	4,5 kg/p



Intense traffic

## High-end performance

### Composition :

100 % mono and multi-filament **polyamide** fibers on reinforced **PVC** backing

Pile weight: 1420 g/m<sup>2</sup>



FIBER



BACKING

### Applications :

high-grade, ultra-absorbent, scraper mat for heavy traffic and traffic areas

### Advantages :

- exceptional performance to protect the floor against the dirt
- ultra resistant
- very high absorption capacity
- high-end scraper fibers
- always keep an exceptional appearance


### Colours :

anthracite, blue or red

other colors: contact us

### + Info :

custom manufacturing on request




Reinforced PVC border



Anthracite



Blue



Red



Reference	Dimensions	Thickness	Weight
MOISSACRL130	1,3 x 25,0 m	9,0 mm	3,7 kg/m <sup>2</sup>
MOISSACRL200	2,0 x 25,0 m	9,0 mm	3,7 kg/m <sup>2</sup>
Contact us for maximal dimensions without border Possibility of supplying underlay (page 18)			



Indoor



Absorbent and scraper



Intense traffic



Vacuuming

Injection /  
extraction cleaning

Cfl-S1



Technical sheet



## High performance mat

### Composition :

Double scraper and absorbent **polyamide** fibers on non-slip backing made of **nitrile rubber**.

Pile weight: 975 g/m<sup>2</sup>

### Applications :



all high traffic areas: corridors, entrances, meeting room, landings, halls ...

### Advantages :


- exceptional performance to protect the floor against the dirt
- ultra resistant
- very high absorption capacity
- high-end scraper fibers
- non-slip backing for added safety
- reinforced borders
- easy passage for wheelchairs and mobility impaired persons

### Colour :

grey

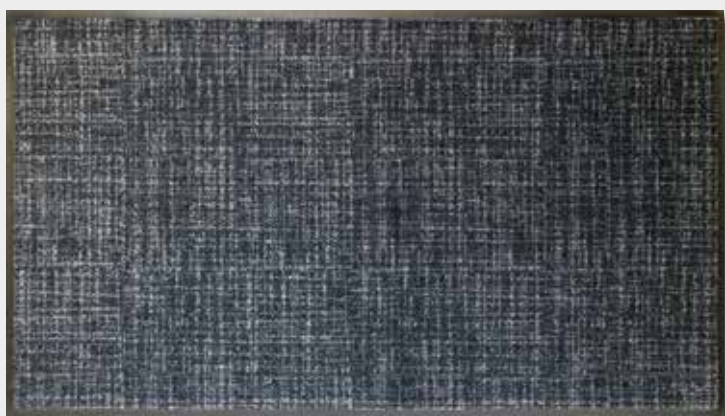


Grey

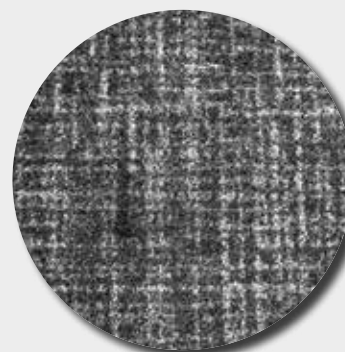

scraper and absorbent polyamide fibers

Reference	Dimensions	Thickness	Weight
CLEANGRAT608502	60 x 85 cm	8 mm	1,59 kg
CLEANGRAT8515002	85 x 150 cm	8 mm	3,99 kg
CLEANGRAT11518002	115 x 180 cm	8 mm	6,46 kg
CLEANGRAT11524002	115 x 240 cm	8 mm	8,61 kg
CLEANGRAT20030002	200 x 300 cm	8 mm	18,72 kg

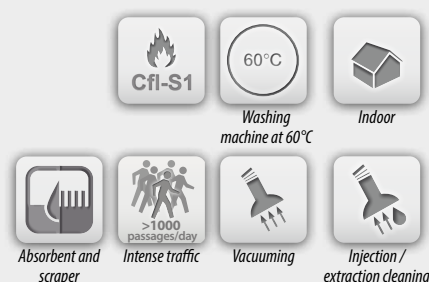



## The high performance mat

### Composition :

100 % polyamide fibers on rubbered PVC backing

Pile weight : 650 g/m<sup>2</sup>



FIBER



BACKING



### Applications :

very absorbent mat for commercial, collective and private premises. For important traffic.


### Advantages :

- effective removal of dust and moisture
- floor protection
- very resistant and absorbent
- very soft velvet touch aspect
- non-slip backing
- easy maintenance

**Colours :** grey, brown, navy blue, purple, turquoise blue, apple green, red, black

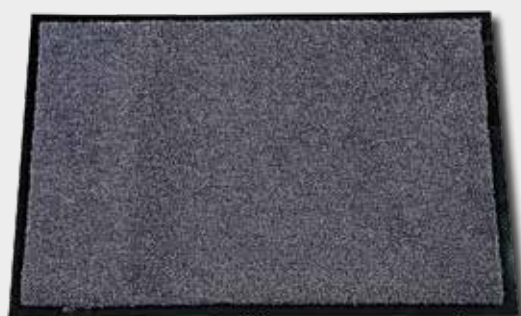

Rubbered PVC backing



Polyamide fibers



Reference	Dimensions	Thickness	Weight
MIRANDE4060	40 x 60 cm	9 mm	0,7 kg/p
MIRANDE6080	60 x 80 cm	9 mm	1,4 kg/p
MIRANDE80120 *	80 x 120 cm	9 mm	2,8 kg/p
MIRANDE90150 **	90 x 150 cm	9 mm	4,0 kg/p
MIRANDE120180 ***	120 x 180 cm	9 mm	6,4 kg

\* only available in grey, brown, navy blue, purple, and black  
 \*\* only available in grey, brown, blue and red  
 \*\*\* only available in grey and blue





## The hygiene professional

### Composition :

100 % polyamide fibers  
on reinforced PVC backing  
Pile weight : 800 g/m<sup>2</sup>



FIBER



BACKING

### Applications :


Absorbent mat for all types of important traffic (corridors, entrances, meeting rooms, elevators, landings, halls ...)

### Advantages :

- very absorbent fibers
- floor protection
- holds dirt
- dries quickly
- very dense fibers
- masks dirt thanks to its speckled fibers
- antistatic: 10<sup>9</sup> Ohms

### Colour :

grey



Reinforced PVC border



Speckled polyamide fibers



Grey



Reference	Dimensions	Thickness	Weight
FIGEAC mat in standard dimensions:			
FIGEAC4060	40 x 60 cm	10 mm	0,82 kg/p
FIGEAC6080	60 x 80 cm	10 mm	1,63 kg/p
FIGEAC90150	90 x 150 cm	10 mm	4,59 kg/p
FIGEAC120180	120 x 180 cm	10 mm	7,34 kg/p
FIGEAC120240	120 x 240 cm	10 mm	9,79 kg/p
FIGEAC mat in roll:			
FIGEACRL12025	1,20 x 25,0 m	10 mm	3,5 kg/m <sup>2</sup>
FIGEACRL20525	2,05 x 25,0 m	10 mm	3,5 kg/m <sup>2</sup>



Indoor



Absorbent



500 to 1000 passages/day  
Important traffic



Vacuuming



Injection /  
extraction cleaning



Cfl-S1



Technical sheet

## Professional absorbent mat

### Composition :

100% polypropylene fibers on rubber backing



### Applications :


Mat for intense traffic: public entrances, restaurants, hotels, schools, businesses ...

### Advantages :

- ultra-resistant mat thanks to its rubber backing
- 2 in 1 : scraper and absorbent
- professional product
- high resistance to high traffic
- self-weighted thanks to its non-slip backing

### Colours :

grey, brown, and red



Absorbent strips

Reference	Dimensions	Thickness	Weight
COMBIABSORB4060	40 x 60 cm	7 mm	1,2 kg/p
COMBIABSORB6090	60 x 90 cm	7 mm	1,9 kg/p
COMBIABSORB80120	80 x 120 cm	7 mm	3,5 kg/p
COMBIABSORB90150	90 x 150 cm	7 mm	4,8 kg/p



Indoor



Absorbent and scraper



Intense traffic



Vacuuming



Injection / extraction cleaning

## MICROFIBERS




Important traffic

## The must

### Composition :

100 % microfiber on non-slip rubbered PVC backing  
Pile weight : 750 g/m<sup>2</sup>



**Applications :** absorbent mats for all types of important traffic (corridors, entrances, meeting rooms, elevators, landings, halls ...)

- Advantages :**
- very resistant mat thanks to its microfibers
  - very soft appearance thanks to the fineness of its fibers
  - very high absorption
  - do not plush
  - holds dirt
  - dries very quickly

**Colours :** grey or brown



Reference	Dimensions	Thickness	Weight
MICROFIBRE4060*	40 x 60 cm	8 mm	0,68 kg/p
MICROFIBRE6080*	60 x 80 cm	8 mm	1,42 kg/p
MICROFIBRE90120*	90 x 120 cm	8 mm	3,08 kg/p
MICROFIBRE90150	90 x 150 cm	8 mm	3,97 kg/p
MICROFIBRE120180	120 x 180 cm	8 mm	6,08 kg/p

\* only available in grey



Indoor



Absorbent



Important traffic



Washing machine at 30°C



No spin cycle



Vacuuming



Injection / extraction cleaning



Technical sheet



## The professional mat

### Composition :

100 % polypropylene fibers molded  
on rubber backing

Pile weight : 320 g/m<sup>2</sup>



### Applications :

Absorbent and ultra scraper mat for all types of intense traffic  
(corridors, entrances, meeting rooms, elevators, landings, halls ...)

### Advantages :

- very resistant
- excellent scraper function
- ideal for an intense traffic
- very good value for money
- non-slip rubber backing

Colours : grey, brown or blue



Moulded fibers



Rubber border



Grey

Brown

Blue



Reference	Dimensions	Thickness	Weight
IMPACT4060	40 x 60 cm	10 mm	1,2 kg/p
IMPACT6080	60 x 80 cm	10 mm	3,0 kg/p
IMPACT80120	80 x 120 cm	10 mm	5,0 kg/p
IMPACT90150	90 x 150 cm	10 mm	7,0 kg/p
IMPACT120180	120 x 180 cm	10 mm	11,5 kg/p



## The double action mat

### Composition :

100 % scraper and absorbent fibers of polypropylene on PVC backing

Pile weight : 600 g/m<sup>2</sup>



### Applications :


Absorbent and scraper mat for all types of important traffic: corridors, entrances, meeting rooms, elevators, landings, halls ...

### Advantages :

- absorbent and scraper fibers
- the 2 in 1 dirt barrier
- floor protection
- holds dirt
- masks dirt thanks to its speckled fibers

### Colours :

grey or brown

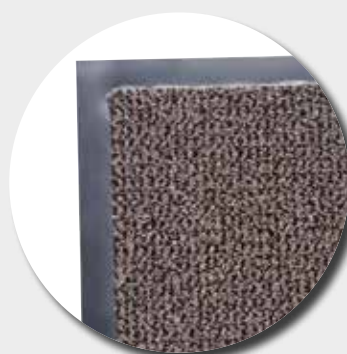

PVC borders



scraper fibers + speckled absorbents

Reference	Dimensions	Thickness	Weight
BELLAC6090	60 x 90 cm	8 mm	1,70 kg/p
BELLAC90150*	90 x 150 cm	8 mm	4,23 kg/p
BELLAC120180	120 x 180 cm	8 mm	6,17 kg/p

\* Only available in grey





## The anti-dust mat

### Composition :

100 % polypropylene fibers on PVC backing

Pile weight : 550 g/m<sup>2</sup>



FIBER



BACKING

### Applications :

Absorbent and scraper mat for all types of important traffic: corridors, entrances, meeting rooms, elevators, landings, halls ...

### Advantages :

- absorbent fibers
- velvet touch aspect
- the ideal anti-dust mat for your entrance
- floor protection
- holds dirt
- masks dirt thanks to its speckled fibers

**Colours :** grey, brown or red

**+ Info :** custom made dimension on request




PVC borders



Speckled polypropylene fibers




Grey



Brown



Red



Reference	Dimensions	Thickness	Weight
QUERCY mat in standard dimensions:			
QUERCY4060*	40 x 60 cm	8 mm	0,8 kg/p
QUERCY6090	60 x 90 cm	8 mm	1,7 kg/p
QUERCY90150	90 x 150 cm	8 mm	4,2 kg/p
QUERCY120180	120 x 180 cm	8 mm	7,5 kg/p
QUERCY120240*	120 x 240 cm	8 mm	8,8 kg/p
QUERCY mat in roll:			
QUERCYRL225*	2,0 x 25,0 m	8 mm	3,2 kg/m <sup>2</sup>
Contact us for maximal dimension without border			
* only available in grey			



Indoor



Absorbent



Important traffic



Washing machine at 30°C



No spin cycle



Vacuuming



Injection / extraction cleaning



Technical sheet

# ABSORGRAT



>1000 passages/day  
Intense traffic

## Tri-zone mat Ultra scraper and ultra absorbent

### Composition :

100% scraper and absorbent  
polypropylene fiber on vinyl backing  
Pile weight : 750 g/m<sup>2</sup>



FIBER



BACKING

**Applications :** absorbent and scraper mats for all types of intense traffic (entrances, corridors, meeting rooms, landings, elevators, halls ...)

### Advantages :

- 2 in 1 : scraper and absorbent mat
- triple zone mat (scraper, mixed, and absorbent)
- very resistant
- the ideal anti-dust mat for your entrance
- floor protection
- holds dirt and moisture

**Colour :** black

Reference	Dimensions	Thickness	Weight
ABSORGRAT9015020	90 x 150 cm	10 mm	3,10kg/m <sup>2</sup>
ABSORGRAT12019020	120 x 190 cm	10 mm	3,10kg/m <sup>2</sup>



Scraper part



Mix part



Absorbent part



Indoor



Absorbent and  
scraper



>1000  
passages/day  
Intense traffic



Vacuuming



Injection /  
extraction cleaning

# BIGRAMAT



Regular  
traffic

## 2 in 1 mat: Ultra scraper and ultra absorbent

### Composition :

Double scraper and absorbent  
polypropylene fibers on PVC backing  
Pile weight : 700 g/m<sup>2</sup>

### Applications :

Absorbent and scraper mat for regular traffic

### Advantages :

- 2 in 1 : scraper and absorbent mat
- the ideal anti-dust mat for your entrance
- floor protection
- holds dirt and moisture
- very good value for money



FIBER



BACKING

### Colours :

Bicolour grey / black



Indoor



Absorbent and  
scraper



500  
passages/day  
Regular traffic



Vacuuming



Injection /  
extraction cleaning

Reference	Dimensions	Thickness	Weight
BIGRAMRL068100220	0,68 x 10 m	10 mm	1,56 kg/m <sup>2</sup>



## The performance of a scraper and absorbent mat

### Composition :

34 % **polypropylene** monofilament fibers and 66 % polypropylene fibers on **PVC** backing

Pile weight : 500 g/m<sup>2</sup>

### Applications :

Absorbent and scraper mat for normal traffic

### Advantages :

- 2 in 1 : scraper and absorbent mat
- economical
- very good value for money

### Colours :

grey, brown, and blue




Anti-dust mats



FIBER



BACKING



Grey



Brown



Blue



Reference	Dimensions	Thickness	Weight
GRAMAT4060	40 x 60 cm	8 mm	0,7 kg/p
GRAMAT6080	60 x 80 cm	8 mm	1,5 kg/p
GRAMAT90150	90 x 150 cm	8 mm	4,2 kg/p
GRAMAT12018002*	120 x 180 cm	8 mm	6,0 kg/p

\* Available only in grey



Indoor



Absorbent and  
scraper



Regular traffic



Washing machine  
at 30°C



No spin cycle



Vacuuming



Injection /  
extraction cleaning



Technical  
sheet

## Economic mat

### Composition :

100 % polypropylene fibers on PVC backing

Pile weight : 400 g/m<sup>2</sup>



FIBER



BACKING



### Applications :

absorbent mat for all types of normal traffic (corridors, entrances, meeting rooms, elevators, landings, halls ...)

### Advantages :

- economical
- floor protection
- velvet touch aspect
- very good value for money

### Colours :

grey, brown, and blue

### + Info :

custom manufacturing on request




Grey



Brown



Blue




Speckled polypropylene fibers



Reference	Dimensions	Thickness	Weight
CAHORS mat in standard dimensions:			
CAHORS4060	40 x 60 cm	6,5 mm	0,6 kg/p
CAHORS6080	60 x 80 cm	6,5 mm	1,2 kg/p
CAHORS60120*	60 x 120 cm	6,5 mm	1,6 kg/p
CAHORS60180*	60 x 180 cm	6,5 mm	3,2 kg/p
CAHORS80120	80 x 120 cm	6,5 mm	2,7 kg/p
CAHORS90150	90 x 150 cm	6,5 mm	4,1 kg/p
CAHORS120180	120 x 180 cm	6,5 mm	6,3 kg/p
CAHORS120240	120 x 240 cm	6,5 mm	8,4 kg/p
FLORAC mat in roll:			
FLORACRL09025**	0,9 x 25,0 m	6,5 mm	3,2 kg/m <sup>2</sup>
FLORACRL12025*	1,2 x 25,0 m	6,5 mm	3,2 kg/m <sup>2</sup>

Possibility of supplying underlay (page 18)

\* only available in grey \*\* only available in grey and brown

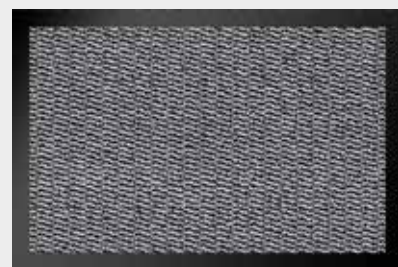

Indoor



Absorbent



Regular traffic

Washing machine  
at 30°C

No spin cycle



Vacuuming

Injection /  
extraction cleaningTechnical  
sheet



## scraper and absorption

### Composition :

100 % needled polypropylene fibers  
on latex gel backing

### Applications :

Mat for regular passage

### Advantages :

- very resistant
- non-slip
- economical

### Colour :

anthracite

### + Info :

contact us for other colours



scraper and absorbent fibers



latex gel backing



FIBER



BACKING

Reference	Dimensions	Thickness	Weight
PREMIUMRL1175002	1,0 x 17,5 m*	6 mm	2,25 kg/m <sup>2</sup>
PREMIUMRL13002	1,0 x 35,0 m*	6 mm	2,25 kg/m <sup>2</sup>
* length may vary upon production			



Regular traffic



Vacuuming



Indoor



Absorbent and  
scraper

## Gratings for use in wet environments

**Composition :**  
polyethylene and EVA

### Applications :

- private pools, bathrooms, shower cabins, saunas, changing rooms, fitness centers, sports centers ...
- banned in public pools

### Advantages :

- non-slip surface thanks to studs
- ingenious structure allowing immediate drainage
- roll made of disconnecting strips 10 cm wide
- infinite length possible thanks to connections
- comfortable to walk barefoot
- odorless material
- antibacterial and fungicidal treatment for long-term protection
- soundproofing
- resistant to temperature variations: - 35 ° C to + 70 ° C
- classification A, B and C according to DIN 51097 standard for slip resistance


**Colours :** blue or grey

### + Info :

- custom length
- 3 to 4 connections per meter



Mounting clips with a hammer to join one roll to another

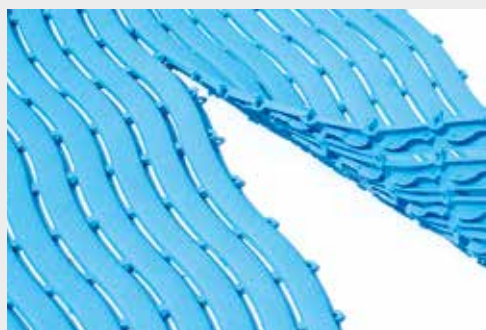

Disconnectable strips

Blue 08

Grey 02



Reference	Dimensions	Thickness	Weight
SOFTSTEPNRL02 (Grey)	0,60 x 16 m	9 mm	1,32 kg/ml
SOFTSTEPNRL08 (Blue)	0,60 x 16 m	9 mm	1,32 kg/ml
CLIPSOFTSTEPN30	Length : 26 mm	6 mm	0,01 kg/p





## Professional gratings for use in wet environments

### Composition :

Flexible PVC

### Applications :

- private pools, bathrooms, shower cabins, saunas, changing rooms, fitness centers, sports centers ...
- banned in public pools

### Advantages :

- antibacterial and fungicidal treatment
- original concept allowing drainage of water from all sides
- non-slip: C-group according to DIN 51097
- comfortable
- easy to install
- resistant to temperature variations (-5 °C to + 60 °C)
- available in various widths and lengths
- draining

### Colours :


wide choice of colours, see colour chart below

### + Info :

- junctions available on request (reference EHA96 and EHA93) to attach one grating to another (3 to 5 fittings per meter)
- bevelled edges available upon request (for ref EHA96 and EHA93)




EHA 96

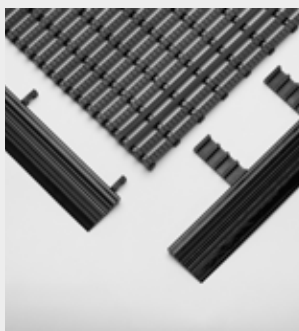

Bevelled edges  
Only for EHA 93 and EHA96



EHA 96






EHA 88



EHA 96



EHA 93

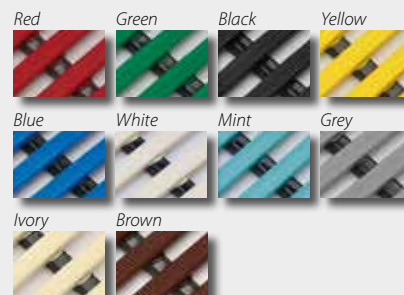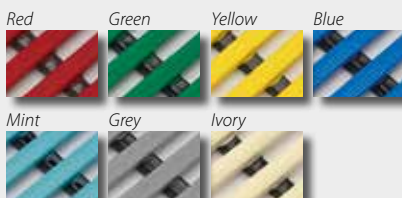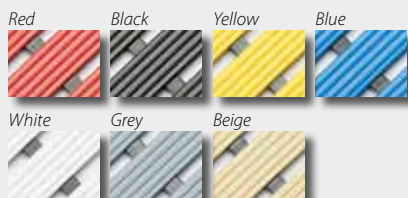

Reference	Standard widths	Standard lengths	Custom length	Thickness	Weight
EHA88	60, 80, 100 cm	10 m	All lengths up to 20 m	12 mm	6,0 kg/m <sup>2</sup>
EHA96	40, 60, 80, 100, 120 cm	10 m	All lengths up to 30 m	12 mm	5,5 kg/m <sup>2</sup>
EHA93	40, 50, 60, 80, 100, 120 cm	10 m	All lengths up to 30 m	14 mm	6,8 kg/m <sup>2</sup>

Other width contact us

Non-contractual photos - Dimensions and weights are given for information purpose only - Product tolerance +/- 5%.



High pressure  
washing



Water jet  
washable



Draining



Technical  
sheet

## Optimum protection for your office's floors

### Composition :

100 % clear polycarbonate or 100 % polyethylene (only ref DESSOUSCHAISE89119).

### Applications :


chair mat for offices and homes

### Advantages :


- extremely robust
- pleasant to use (caster chairs move easily, without friction)
- good heat resistance => suitable for heated floors
- adapted for disabled people
- suitable for allergy sufferers: PVC and vinyl free
- **studded chair mat** : optimal protection of rugs and carpets + non-slip (adheres to the ground thanks to studs that protect the pile of rugs and carpets)
- **Smooth chair mat**: effective protection of hard and smooth floors (parquet and laminate, tiles, concrete, marble, ...) + non-slip (adheres to the ground thanks to its non-slip back, without leaving a trace)

### Colour :

transparent

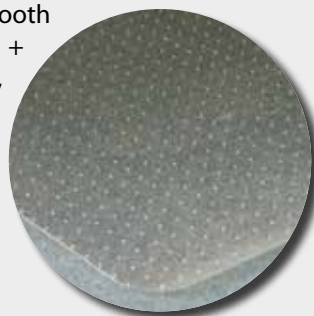

Studded chair mat

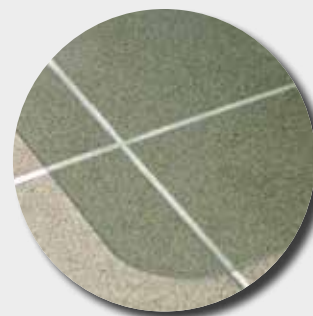

Smooth chair mat



Reference	Dimensions	Thickness	Weigth	Floor type
TRANSL1092L	90 x 120 cm	2 mm	2,32 kg/p	Hard floors
TRANSL1100L	100 x 120 cm	2 mm	2,58 kg/p	Hard floors
TRANSL1152L	120 x 150 cm	2 mm	3,87 kg/p	Hard floors
TRANSL2092P	90 x 120 cm	5 mm	2,97 kg/p	carpet
TRANSL2100P	100 x 120 cm	5 mm	3,30 kg/p	carpet
TRANSL2152P	120 x 150 cm	5 mm	4,95 kg/p	carpet
DESSOUSCHAISE89119	89 x 119 cm	1,5 mm	1,4 kg/p	Hard floors





## The peelable mat: the trap for all soils

**Composition :**  
polyethylene sheet

### Applications :

laboratories, clean rooms, hospitals, any sterile place ...

### Advantages:

- very effective way to remove all dirt and dust thanks to the sticky surface
- 30 numbered adhesive sheets for easy count
- each sheet can be used several times before being removed
- adhesive lower surface for better adherence
- easy to use
- hygienic

### Colour :


White



Protective sheet

Sheets

Lower protective sheet

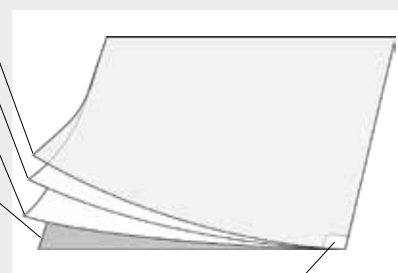

Label indicating the number of the sheet

Reference	Dimensions	Thickness	Weight
TAC600900	60 x 90 cm	1,6 mm	1,0 kg/p
TAC4501140	45 x 114 cm	1,6 mm	0,8 kg/p
TAC6601140	66 x 114 cm	1,6 mm	1,1 kg/p

## FOOTBATH

## The optimal solution for foot disinfection

**Composition :**  
100 % rubber

### Applications :


entrances requiring foot disinfection

### Advantages :

- easy to install
- optimal disinfection without loss of products
- non-slip
- scraper studs

### Colour : black

**+ Info :** detergent products are to be diluted, contact us for more details



scraper studs



Reference	Dimensions	Thickness	Weight
PEDILUVECC810985	81 x 98,5 cm	50 mm	Aprox. 15,0 kg/p



# ASTROTURF

## Artificial turf scraper mat

### Composition :

100 % polyethylene

### Applications :

mat for heavy traffic: public entrances, restaurants, hotels, schools, businesses ...

### Advantages :

- resistant: ideal for outdoors for all types of climates
- 100 % recyclable
- draining
- easy to clean
- always keep a clean look
- hygienic
- non-slip backing



### Colours :

green, brown



Green

Brown



Outdoor



Scraper



Water jet washable



Efl



UV resistant

Reference	Dimensions	Thickness	Weight
ASTROTURFRL09117	0,91 x 17,0 m	18-21 mm	2,2 – 2,5 kg/m <sup>2</sup>

## GREEN

## Golf green turf

### Composition :

tufted polypropylene fibers on black precoat (latex coating) without pads

### Applications :

terraces, gardens, courtyards, exhibition stands, boat decks ...

### Advantages :

- decorative
- resistant

### Colour :

- Green



Vacuuming



Water jet washable



UV resistant

Reference	Dimensions	Thickness	Weight
GREENSPRRL13007	1,0 x 30,0 m	7 mm	1,2 kg/m <sup>2</sup>



## Carpet type turf

### Composition :

needled polypropylene fibers on resin backing with studs

### Applications :

terraces, exhibition stands, boat decks ...

### Advantages :

- draining studs
- decorative
- resistant
- various weight and colours available

### Colours :


- green
- other colors: contact us

### + Info :

- also exists without studs: contact us



Upper surface

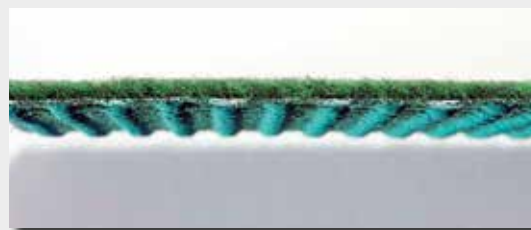

Lower surface

Reference	Dimensions	Thickness	Weight
ECOLORLPL13007	1 x 30 m	8 mm	1,20 kg/m <sup>2</sup>
ECOLORLPL23007	2 x 30 m	8 mm	1,20 kg/m <sup>2</sup>



Outdoor



Covered outdoor



Vacuuming



Water jet washable



UV resistant

## EXPO RED

## Event carpet

### Composition :

100 % polypropylene

### Applications :

exhibition stands, events, boat decks ...

### Advantages :

- economical
- easy to install (with double-sided tape)
- ideal for events (shows, fairs, expo ...)
- easy to clean

### Colour :

Red

### + Info :

- other dimensions: contact us



Upper surface



Reference	Dimensions	Thickness	Weight
EXPOROUGE1504	1 x 5 m	3 mm	0,76 kg/m <sup>2</sup>
EXPOROUGE13004	1 x 30 m	3 mm	0,76 kg/m <sup>2</sup>



Indoor



Covered outdoor



Vacuuming



Cfl-S1



Intense traffic  
Événementiel

## Interlocking slabs

### Composition :

recyclable and UV -proof **polypropylene**

### Applications :

indoor / outdoor use: workshops, commercial premises, exhibition stands, garages, showrooms, terraces ...

### Advantages :


- easy ventilation and drainage thanks to its cells
- non-slip
- perfect finish thanks to borders and angles
- simple installation and maintenance
- withstands weight: 400 T / m<sup>2</sup>
- UV resistant
- many colours available: possibility to realize or materialize zones

### Colours :

- green, white, grey, blue, red
- other colors: contact us

### + Info :


Expansion joints to be applied every 2.5 to 3 ml (ie every 8 to 10 slabs)



Expansion joint



Colours

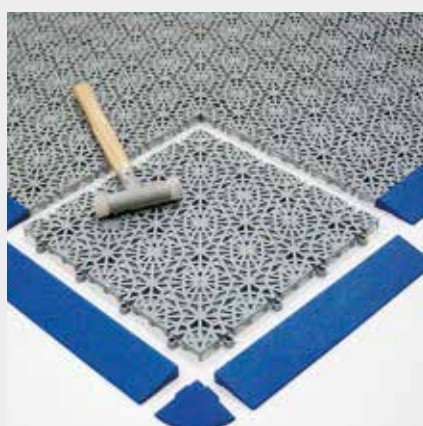

Borders and angles



Reference	Dimensions	Thickness	Weight
ID UNIVERSAL (1 m <sup>2</sup> set)	30 x 30 cm	13,5 mm	3,0 kg/m <sup>2</sup>
Borders (set of 5 pces)	30 x 5,5 cm	13,5 mm	0,25 kg / pack
Angles (set of 4 pces)	5,5 x 5,5 cm	13,5 mm	0,04 kg / pack
Expansion joints (set of 2 pcs)	30 x 7,5 cm	13,5 mm	0,21 kg / pack

1m<sup>2</sup> = 11 slabs



Outdoor



High pressure washing



Draining



Use up to -40°C



UV resistant



## Interlocking PVC slabs

### Composition :

Recyclable and flexible PVC

### Applications :

- hard quality 92 ShoresA: workshops, showroom, stores, warehouses ...
- flexible quality 78 ShoresA: offices, schools, gyms, cold rooms ...

### Advantages :

- granulated or pelletized finish
- high resistance to wear and abrasion
- non-slip: R10 according to DIN 51130
- easy to use: free standing with a mallet
- high resistance to chemicals (list on request)


### Colours :

black, light grey, blue, green or red  
other colors: contact us

### + Info :

Contact us for :

- Forklift passage
- antistatic quality
- maintenance sheet available on request




Border



Pelleted surface



Granulated surface

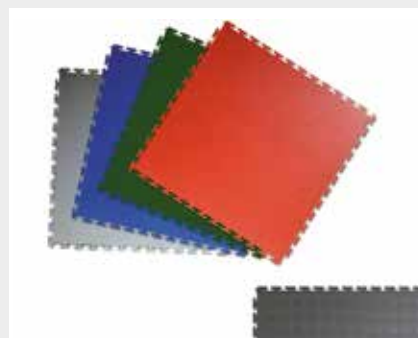

Reference	Dimensions	Thickness	Weigth
IDEX5P (pelleted)	50,1 x 50,1 cm	5 mm	8,0 kg/m <sup>2</sup>
IDEX5G (granulated)	50,1 x 50,1 cm	5 mm	8,0 kg/m <sup>2</sup>
IDEX5B (border)	50,1 x 7,8 cm	5 mm	1,2 kg / pack of 4
IDEX5A (angle)	59,2 x 7,8 cm	5 mm	1,4 kg / pack of 4

Packaging of 2.5 m<sup>2</sup> per box - Also available in 7 mm thickness



# Pelleted flooring in roll

## The pelleted flooring

**Composition :**  
100 % rubber

### Applications :

halls, shops, shopping malls, offices, banks

### Advantages :

- non-slip
- flexible
- high abrasion resistance
- soundproofing
- easy maintenance
- rough backing for adhesive fixation

### Colours :

- standard black or grey
- other colors: contact us

+ **Info :** nitrile version, grease resistant on request

Reference	Dimensions	Thickness	Weight
PAST100N3	1,00 x 10 m	3 mm	4,0 kg/m <sup>2</sup>
PAST120N3 (black)	1,20 x 10 m	3 mm	4,0 kg/m <sup>2</sup>
PAST120G3 (Grey)	1,20 x 10 m	3 mm	4,0 kg/m <sup>2</sup>

Pellets height: 1 mm - Pellets diameter: 24 mm



Pelleted flooring



Cleaning by  
single brush



Only for PAST120N3



Use up to  
-40°C



100%  
RUBBER

## CHECKER

### Industrial rubber mat

**Composition :**  
100 % Natural rubber or nitrile rubber

### Applications :

protection of industrial floors and shelves  
or workbenches


### Advantages :

- non-slip
- flexible
- high resistance to wear and tear
- rough backing for adhesive fixation


### Colours :

- black or grey
- other colors: contact us

+ **Info :** nitrile version, grease resistant on request

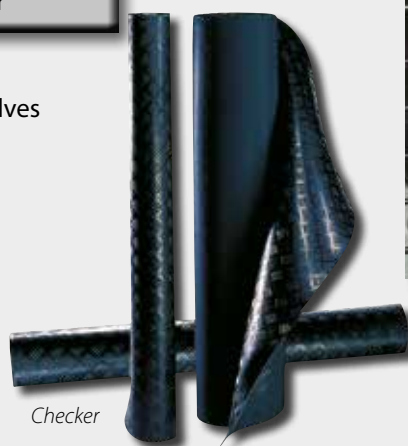

Checker

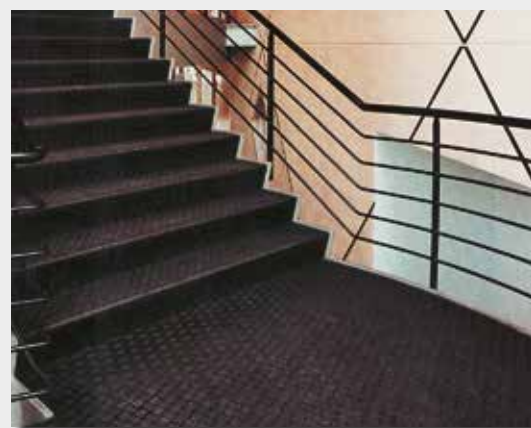

Checker 6



Cleaning by  
single brush



Use up to  
-40°C



100%  
RUBBER



Only for 140N6

Reference	Dimensions	Thickness	Weight
CHECKER100N3	1,00 x 10 m	3 mm	4,3 kg/m <sup>2</sup>
CHECKER140N3 (black)	1,40 x 10 m	3 mm	4,3 kg/m <sup>2</sup>
CHECKER140N6 (black)	1,40 x 10 m	6 mm	8,4 kg/m <sup>2</sup>
CHECKER140G3 (Grey)	1,40 x 10 m	3 mm	3,9 kg/m <sup>2</sup>
CHECKER140N3NBR (nitrile)	1,40 x 10 m	3 mm	4,3 kg/m <sup>2</sup>



## The grooved mat

### Composition :

100 % Natural rubber or nitrile rubber

**Applications :** protection of industrial floors as well as shelves or workbenches

### Advantages :

- non-slip
- flexible
- high resistance to wear and tear
- rough lower surface for easy gluing
- easy cutting

### Colours :

- black or grey
- other colors: contact us



Fines Stries

Reference	Dimensions	Thickness	Weight
FINES60NN	0,60 x 10 m	3 mm	2,5 kg/m <sup>2</sup>
FINES100N (black)	1,00 x 10 m	3 mm	2,5 kg/m <sup>2</sup>
FINES120N (black)	1,20 x 10 m	3 mm	2,5 kg/m <sup>2</sup>
FINES120G (Grey)	1,20 x 10 m	3 mm	2,7 kg/m <sup>2</sup>
FINES120NNBR (nitrile)	1,20 x 10 m	3 mm	3,4 kg/m <sup>2</sup>



## Grooved flooring

## The grooved mat

### Composition :


100 % rubber

**Applications :** industrial floor protection

### Advantages :

- non-slip
- flexible
- high resistance to wear and tear
- rough lower surface for easy gluing

**Colours :** black, other colors: contact us

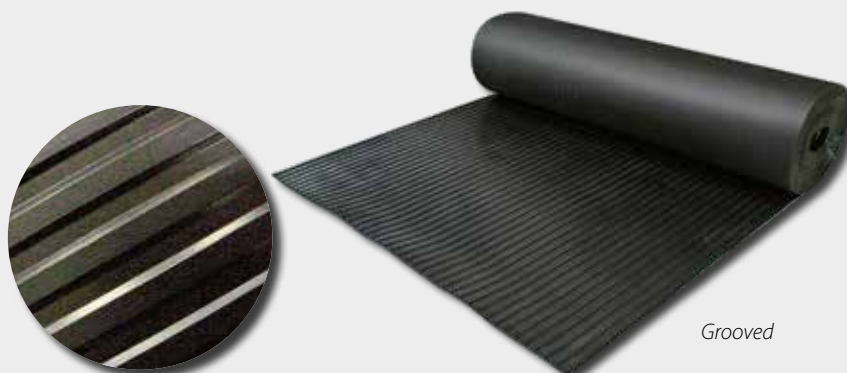

Grooved

Reference	Dimensions	Thickness	Weight
CANNELE100N6 (black)	1,00 x 10 m	6 mm	6,5 kg/m <sup>2</sup>
CANNELE120N6 (black)	1,20 x 10 m	6 mm	6,5 kg/m <sup>2</sup>



## The hammered rubber mat

### Composition :

100 % rubber

### Applications :

commercial and industrial floor protection


### Advantages :

- non-slip
- soundproofing
- withstands heavy loads
- flexible
- high abrasion resistance
- available in wide width


### Colour :

black


+ Info : cutting on request



IDS 6 - IDS 10  
Upper surface




IDS 10 T  
Upper surface



IDS 12 - IDS 16  
Upper surface



IDS 6 - IDS 10 - Lower surface



IDS 10 T - Lower surface



IDS 12 - IDS 16 - Lower surface



High pressure  
washing

100%  
RUBBER

Reference	Designation	Dimensions	Thickness in mm	Number of folds	Lower surface finish
IDS6200	IDS6 flooring	Width 2 m - Length up to 60 m	6 mm	0	fabric imprinte
IDS10	IDS 10 flooring	Width 1,50 or 1,80 m Length up to 60 m	10 mm	0	fabric imprint
IDS10T	IDS 10 flooring with textile insertion	Width 1,50 or 1,80 or 2,40 m Length up to 50 m	10 mm	1	textile insertion
IDS12T	IDS12 flooring - standard width < 1,60 m	Standard widths : 1,00 - 1,20 - 1,50 -1,60 m - Length up to 50 m	12 mm	1	Smooth
IDS12TS/MESURE	IDS12 flooring - custom width < 1,60 m	Widths from 1,00 to 1,60 m Length up to 50 m	12 mm	1	Smooth
IDS12T	IDS12 flooring - standard width > 1,61 m	Standard widths : 1,80 - 2,00 m Length up to 50 m	12 mm	1	Smooth
IDS12TS/MESURE	IDS12 flooring - custom width > 1,61 m	Widths from 1,61 to 2,00 m Length up to 50 m	12 mm	1	Smooth
IDS16T	IDS16 flooring - standard width < 1,60 m	Standard widths : 1,50 - 1,60 m Length up to 50 m	16 mm	1	Smooth
IDS16TS/MESURE	IDS16 flooring - custom width < 1,60 m	Widths from 1,00 to 1,60 m Length up to 50 m	16 mm	1	Smooth
IDS16T	IDS16 flooring - standard width > 1,61 m	Standard widths : 1,80 - 2,00 m Length up to 50 m	16 mm	1	Smooth
IDS16TS/MESURE	IDS16 flooring - custom width > 1,61 m	Widths from 1,61 to 2,00 m Length up to 50 m	16 mm	1	Smooth



## Custom made rubber mat

### Composition :

manufactured rubber (different grades: natural rubber, SBR, nitrile, EPDM, anti-abrasion ...)

**Applications :** protection of industrial floors as well as shelves or workbenches, gaskets, strips, bibs ...

### Advantages :

- non-slip
- soundproofing
- excellent resistance to wear and tear

### Colours :

according to quality

### + Info :

exists with or without fabric inlay, with fabric imprint on the lower surface for ease of gluing and in different thicknesses: please contact us



Water jet washable



High pressure washing



100% RUBBER

Reference	Designation	Dimensions	Thickness in mm	Number of folds	Surface finish Upper / Lower
CCO1FL1FIT2	CCO1FL1FIT2 rubber	1,40 x 10 m	2 mm	0	Smooth / fabric imprint
CCO2FL3	CCO2FL3 rubber	1,40 x 10 m	3 mm	0	Smooth / Smooth
CCO1FLFIT2P4	CCO1FLFIT2P4 rubber	1,40 x 10 m	4 mm	2	Smooth / fabric imprint
CCN2FL4	CCN2FL4 rubber	1,40 x 10 m	4 mm	0	Smooth / Smooth
CCO2FL6	CCO2FL6 rubber	1,40 x 10 m	6 mm	0	Smooth / Smooth
BLACKSTART6	BLACKSTAR rubber Thick. 6 mm	Width 1,40 - Length up to 10 m	6 mm	1	Smooth / fabric imprint
IDSHEET4MM	IDSHEET 4 mm rubber	Width 2 m - Length up to 60 m	4 mm	1	Smooth / fabric imprint

Contact us for any other quality

## IDS Ramp

### Special mat for cattle truck ramp

### Composition :

100 % rubber


**Applications :** mat for cattle truck ramp made of wood or iron

### Advantages :

- avoids all slip risks during the ascent and descent of animals
- very robust rubber mat
- save time when loading animals
- reduces trampling noise

**Colour :** black

**+ Info :** cutting on request

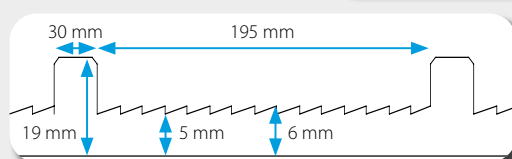

Reference	Dimensions	Thickness	Weight
IDS RAMP	2,4 x 30,0 m	19 mm	8,5 kg/m <sup>2</sup>



Water jet washable



High pressure washing



100% RUBBER

## Sports floorings

### Composition :

85% fine recycled tire **rubber** granules (black) and 15% colored EPDM granules

### Applications :

corridors, stairs, walkways, ramps, sports halls, ski resorts, ski rentals, toilets, locker rooms, ice rinks etc.


### Advantages :

- robust and insensitive to water
- sound and heat insulation
- aesthetic and decorative
- non-slip
- high wear resistance
- porous, facilitates drainage
- noise and shock absorbent

### Laying :

glued with polyurethane glue

**Colours :** SPORTNEIGE : black / Grey  
IDNEIGE : black / Blue  
Other colors on request

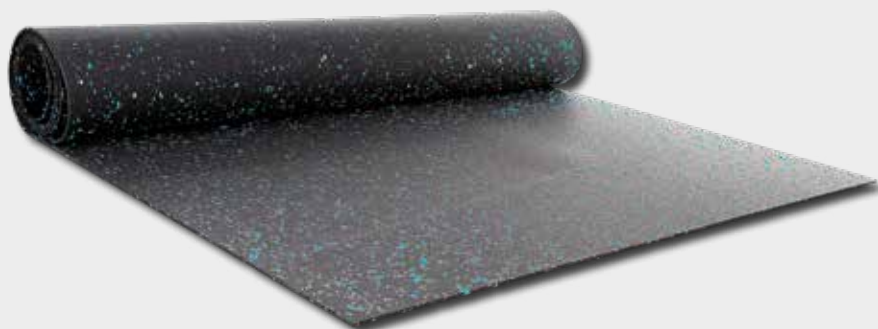


### SPORTNEIGE




Black / Dark Grey


Other colors (on request)



Black / Dark Grey




Black / Green




Black / Blue



Black / Lila



Black / Red



Black / Yellow




Black / Blue / Grey




Black / Orange

### IDNEIGE

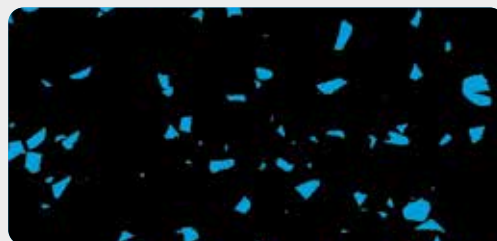

Black / Blue

Other colors (on request)



Black / Yellow



Black / Green

Reference	Dimensions	Thickness	Weight
SPORTNEIGE			
SPORTNEIGE6	1,5 x 20,0 m	6 mm	6,3 kg/m <sup>2</sup>
SPORTNEIGE10	1,5 x 12,0 m	10 mm	10,5 kg/m <sup>2</sup>
IDNEIGE			
IDNEIGE6	1,5 x 20,0 m	6 mm	6,3 kg/m <sup>2</sup>
IDNEIGE10	1,5 x 12,0 m	10 mm	10,5 kg/m <sup>2</sup>



Outdoor



Covered  
outdoor



>1000  
passages/day  
Intense traffic



High pressure  
washing



Water jet  
washable



Efl



UV resistant



100%  
RUBBER



Technical  
sheet



## The top of the rubber flooring

### Composition :

**Délineige Grey/black** : 65% of colored EPDM granules and 35% of **black EPDM rubber** granules, agglomerated with a **polyurethane** binder

**Monotone Délineige**: 100 % colored EPDM granules bonded with a **polyurethane** elastomer

### Applications :

busy outdoor facilities: cable cars, gondolas, school grounds, nurseries, terraces, games rooms, swimming pools, sports facilities ...

### Advantages :

- flexible
- robust and insensitive to water
- non-slip
- sound and heat insulation
- high resistance to wear, aging and UV
- shock absorbent
- porous, facilitates drainage
- excellent resistance to stress and mechanical influences
- aesthetic and decorative

**Laying** : glued with polyurethane glue (1 to 1,5 kg/m<sup>2</sup>)


**Colours** : speckled or unicoloured (see color chart)




Sports rubber floorings



### DELINEIGE monotone: (on request)

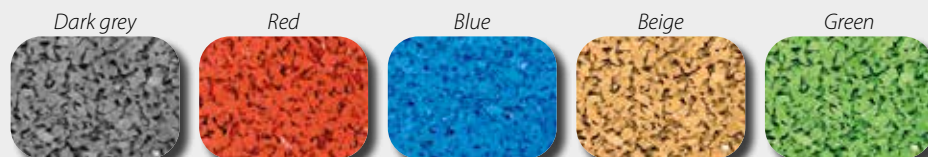

### DELINEIGE speckled:

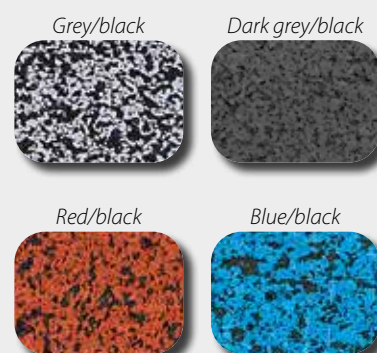

Reference	Dimensions	Thickness	Weight
DELINEIGE Grey/black			
DELINEIGE6GN	1,25 x 20,0 m	6 mm	7,5 kg/m <sup>2</sup>
DELINEIGE8GN	1,25 x 15,0 m	8 mm	10,0 kg/m <sup>2</sup>
DELINEIGE10GN	1,25 x 12,0 m	10 mm	12,5 kg/m <sup>2</sup>
DELINEIGE monotone (on request)			
DELINEIGE4	1,25 x 30,0 m	4 mm	4,38 kg/m <sup>2</sup>
DELINEIGE6	1,25 x 20,0 m	6 mm	6,57 kg/m <sup>2</sup>
DELINEIGE8	1,25 x 15,0 m	8 mm	8,76 kg/m <sup>2</sup>
DELINEIGE10	1,25 x 12,0 m	10 mm	10,95 kg/m <sup>2</sup>



## Recycled rubber roll

### Composition :

recycled rubber aggregates agglomerated with a polyurethane binder

### Applications :

indoor and outdoor use: gymnasiums, ice rinks, fitness centers, sports floors, nurseries, schools ...

### Advantages :

- flexible
- non-slip
- sound and heat insulation
- improves walking comfort
- resilient rubber (shock absorber)
- porous, facilitates drainage
- easy to maintain and insensitive to water

**Laying :** glued with polyurethane glue (1 to 1,5 kg/m<sup>2</sup>)

**Colour :** black



8110



Reference	Dimensions	Thickness	Weight
81104	1,5 x 30,0 m	4 mm	4,0 kg/m <sup>2</sup>
81106	1,5 x 20,0 m	6 mm	6,0 kg/m <sup>2</sup>
811010	1,5 x 12,0 m	10 mm	10,0 kg/m <sup>2</sup>



Outdoor

Water jet washable

UV resistant

100% RUBBER

## CLIP SUPER

### Robust interlocking rubber slabs for various applications

### Composition :

100 % rubber

### Applications :


winter sports resorts, walkways, floor protection

### Advantages :


- self-weighted
- hyper resistant
- excellent thermal and acoustic insulation
- easy installation and reimplantation without gluing thanks to the puzzless
- very non-slip surface R9
- grooved lower surface draining moisture

### Colour :

black

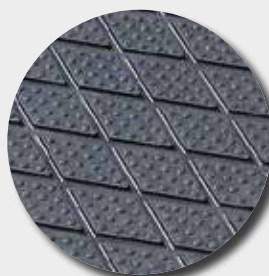

Non-slip diamond shaped upper surface

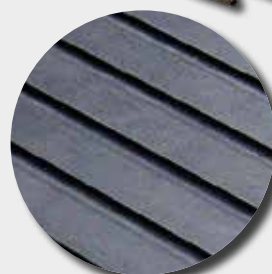

grooved lower surface



Reference	Dimensions	Thickness	Weight
CLIPSUPER	100 x 100 cm	18 mm	21 kg/m <sup>2</sup>



Outdoor

High pressure washing

Cleaning by single brush

Upon Request

Upon Request

Use up to -40°C

UV resistant

100% RUBBER

R9



## Very sturdy interlocking rubber slabs

**Composition :**  
100 % rubber

### Applications :

ice rinks, sports halls, changing rooms, winter sports resorts ...

### Advantages :

- self-weighted
- hyper resistant: resist the passage of ice resurfacer (nail tires)
- excellent thermal and acoustic insulation
- easy installation and reimplantation without gluing.
- cutting with a cutter knife
- non-slip surface R9
- grooved lower surface draining moisture


### Colours :

black, blue, grey, green or red



Sports rubber floorings


Green

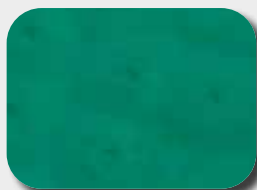



Blue



Grey



Red

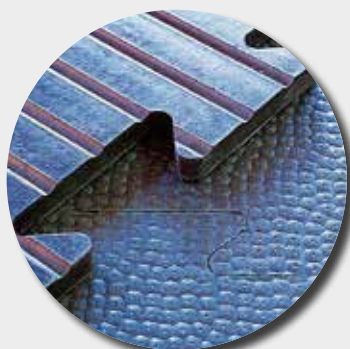

grooved lower surface / hammered upper surface



Reference	Dimensions	Thickness	Weight	Fire Classification
CLIP18	100 x 100 cm	17 mm	23 kg/m <sup>2</sup>	Dfl - S2
CLIP18B	100 x 100 cm	17 mm	23 kg/m <sup>2</sup>	Bfl - S1
CLIP18G	100 x 100 cm	17 mm	23 kg/m <sup>2</sup>	Bfl - S1
CLIP18V	100 x 100 cm	17 mm	23 kg/m <sup>2</sup>	Bfl - S1
CLIP18R	100 x 100 cm	17 mm	23 kg/m <sup>2</sup>	Bfl - S1
CLIP18CFL	100 x 100 cm	17 mm	22 kg/m <sup>2</sup>	Cfl - S1



Outdoor



High pressure washing



Cleaning by single brush



Cfl-S1



Bfl-S1



Use up to -40°C



UV resistant



100% RUBBER



Technical sheet



R9

## M75 - M74 - M73 slabs

### Special interlocking rubber slabs for ice rinks and winter sports resorts

**Composition :**  
100 % rubber

Black




**Applications :** ice rink laps, sports facilities, winter sports resorts ...

#### Advantages :

- comfort
- security
- sound and heat insulation
- quick installation and without gluing
- easy to relocate
- non-slip R9
- high resistance to abrasion

**Colour :** black

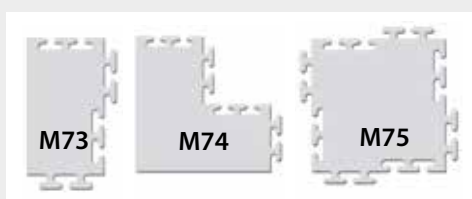

Reference	Dimensions	Thickness	Weight
M73	30,5 x 61 cm	10 mm	2,1 kg/p
M74	30,5 x 61 x 61 cm	10 mm	3,3 kg/p
M75	61 x 61 cm	10 mm	5,3 kg/p



## M72 - M71 - M70 SLABS

### Highly resistant rubber slabs for comfort, safety and protection

**Composition :**  
100 % rubber

#### Applications :


floor protection of sports and bodybuilding centers

#### Advantages :

- comfort
- security
- sound and heat insulation
- quick installation and without gluing
- easy to relocate
- non-slip

#### Colours :


grey, green, blue

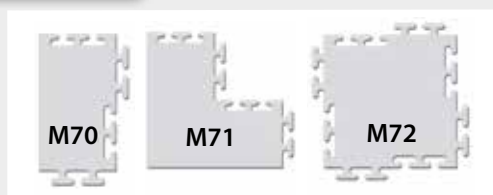

Grey

Green

Blue

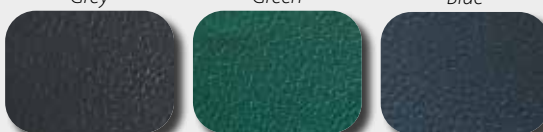

M72

Reference	Dimensions	Thickness	Weight
M70	30,5 x 61 cm	10 mm	2,5 kg/p
M71	30,5 x 61 x 61 cm	10 mm	3,5 kg/p
M72	61 x 61 cm	10 mm	5,2 kg/p





## Sports flooring combining aesthetics and performance

### Composition :

100 % rubber

### Applications :

Highly frequented areas (ice rinks, winter sports resorts ...)

### Advantages :

- two-layer flooring: damping lower layer, highly wear-resistant upper layer
- non-slip R9
- soundproofing
- aesthetic

**Laying :** glued with polyurethane glue

### Colours :

speckled grey, speckled blue, speckled red  
Other colors on request




Black / Blue HE21



Dark grey HE32




Light grey HE13



Red HE30



Blue HE114



100%  
RUBBER

R9



High pressure  
washing



Cleaning by  
single brush



Cfl-S1



Bfl-S1



Use up to  
-40°C

Reference	Dimensions	Thickness	Weight
SOLIDSPORT9MM	100 x 100 cm	9 mm	11,5 kg/m <sup>2</sup>

## IDS Glue

### Two component polyurethane glue

### Composition :

polyurethane (5.0 kg) + hardener (0.7 kg),  
kit of 5.7 kg

**Applications :** for all indoor and outdoor flooring, rubber slabs or tiles, rubber carpeting and synthetic turf


Approximate consumption	
Délineige	1 à 1,2 kg/m <sup>2</sup>
Solid Sport	0,9 à 1 kg/m <sup>2</sup>
Checker / Pelleted mat	0,7 à 0,8 kg/m <sup>2</sup>
Tactile slabs & strips	1 / 1,2 kg/m <sup>2</sup>

### Advantages :

- suitable for bonding on many substrates and for coatings such as concrete and plywood
- recommended for intensive use
- can be subject to significant temperature variations thanks to its flexibility



**Laying :** polymerization time at 5 ° C minimum: after 24 hours for opening to pedestrian traffic, after 48 to 72 hours for an opening to heavy traffic.

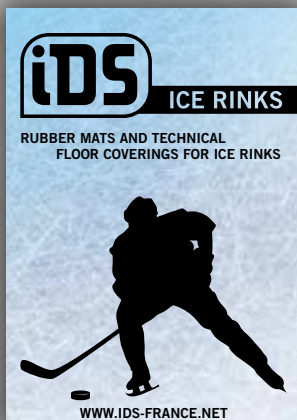

**IDS Industrie Développement Services**  
47 voie St Exupéry - Alpespace  
73 800 Porte de Savoie - France

**Phone: +33 479 843 606**

**Fax: +33 479 843 610**

**ids@ids-france.net**

**www.ids-france.net**

