



**ICE RINKS**

**RUBBER MATS AND TECHNICAL  
FLOOR COVERINGS FOR ICE RINKS**



**[WWW.IDS-FRANCE.NET](http://WWW.IDS-FRANCE.NET)**

# Introduction



The Direction reiterates its commitment to implement the necessary resources to continue to improve client satisfaction and the competitiveness of the company, whilst ensuring the respect of safety of each person and the environment. Our company works with certification or standardization bodies (type LNE, IANESCO, VERITAS, etc.).

## CERTIFIED COMPANY ISO 9001: 2008



«Our company is committed to observing the current REACH regulations»

ID Group / IDS is member of BSCI / FTA and undertakes to follow the principles of the BSCI Code of Conduct (observing laws concerning labour, ethics in business, no child labour, non-discrimination, protection of the environment, etc.).



The IDS products consist mainly of rubber. This natural material is produced from latex secreted by a tree: the Hevea. Rubber is used in two forms:

### Non-recycled natural rubber:

Natural rubber is produced directly from the transformation of latex. It is very resistant to abrasion and remains flexible even in freezing conditions or subjected to prolonged exposure to U.V. Putting in additives during the manufacturing process makes it possible to obtain rubber that is particularly resistant to oil (nitrile rubber) or more specifically and on request; fire classified rubber, or specific colours.

### Non-recycled natural rubber and recycled natural rubber mix:

Natural rubber can also be mixed with recycled rubber to reduce its cost.

The technical characteristics of this mixture perform less well than those of non-recycled rubber.

Recycled rubber is a mixture of aggregates of rubber bound by polyurethane elastomer. The rubber grains mainly come from the recycling process. Recycled rubber is quite suitable for glued floor coverings and very thick and non-glued slabs. It is non-slip, robust and insulates against cold and noise.

## Make the right choice of your product.

To advise you as well as possible in the choice of your gratings or floorings, IDS has devised a simple system of signs to help you quickly identify the characteristics of each of our products.

To choose the right product for you, first of all, you need to think about the use you will make of it and what will be demanded of it.

On what kind of floor will you lay the gratings or covering? Will be it be indoors or outdoors? Are you going to glue it or lay it loose? Slabs or rolls? Do you need a particular fire classification? Are you subject to disabled accessibility standards? What will be the intensity of the traffic? Do you need particular resistance to oil, chemicals, U.V, freezing or slipping?

The answers to these questions and our icons will enable you to choose the most suitable product for your needs.



# M75 SLABS

## Special interlocking rubber slabs for skating rinks

**Composition :** 100% non-recycled natural rubber



### Advantages:

- Loose laying (no gluing)
- Special slabs for skating rinks
- Resistant to ice skates
- Anti-slip
- Heat and sound insulation
- Easy to lay with the interlocking
- High resistance to abrasion
- Cleaning with single disc machine


### Colours:

M75: black


M72: grey / green / blue (contact us)

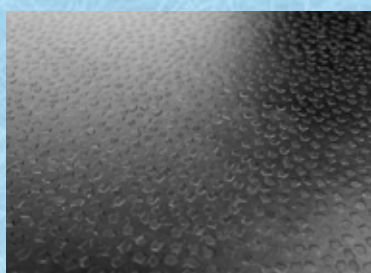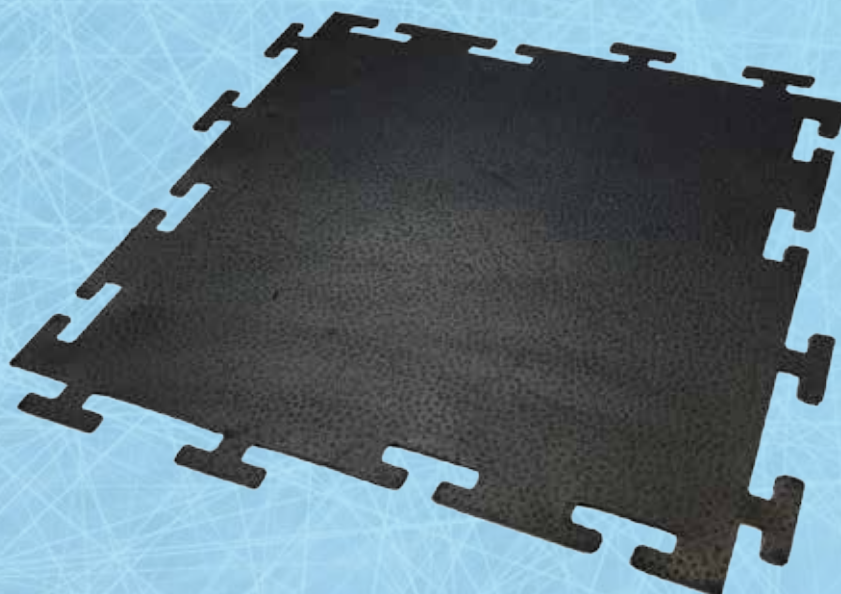

*Upper surface*

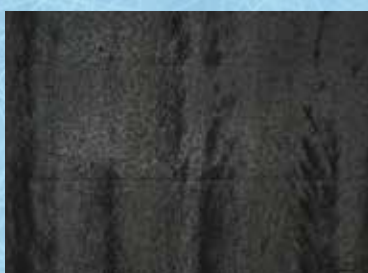

*Inner surface*

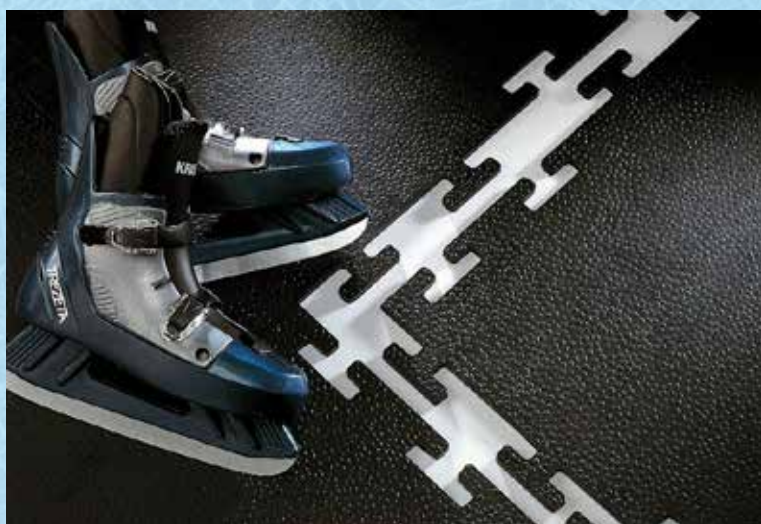

Efl-S1



Cfl-S1

On request



Bfl-S1

On request



Outdoor



for laying



Interlocking  
slabs



>1000  
passages / day

Intensive  
traffic




-40°C

Use up to  
-40°C



UV resistant



100%  
rubber



Draining



High pressure  
washing



Cleaning by  
single brush

Reference	Dimensions	Thickness	Weight	Fire classification
M75 (Black)	610 x 610 mm	10 mm	5,2 kg	Efl
M75CFL (Black)	610 x 610 mm	10 mm	5,2 kg	Cfl-S1
M75BFL (Black)	610 x 610 mm	10 mm	5,2 kg	Bfl-S1
M72 (colour)	610 x 610 mm	10 mm	5,2 kg	-



# CLIP 18 SLABS


## Ultra-rugged interlocking rubber slabs

**Composition :** 100% non-recycled natural rubber

### Advantages:

- Loose laying (no gluing)
- Special slabs for skating rinks
- Extremely resistant to ice skates
- Resilient to ice resurfacing machine passages
- Very anti-slip
- The grooved inner surface drains humidity
- Heat and sound insulation
- Easy to lay with the interlocking
- Cleaning with single disc machine


**Colours:** black - Other colours on request

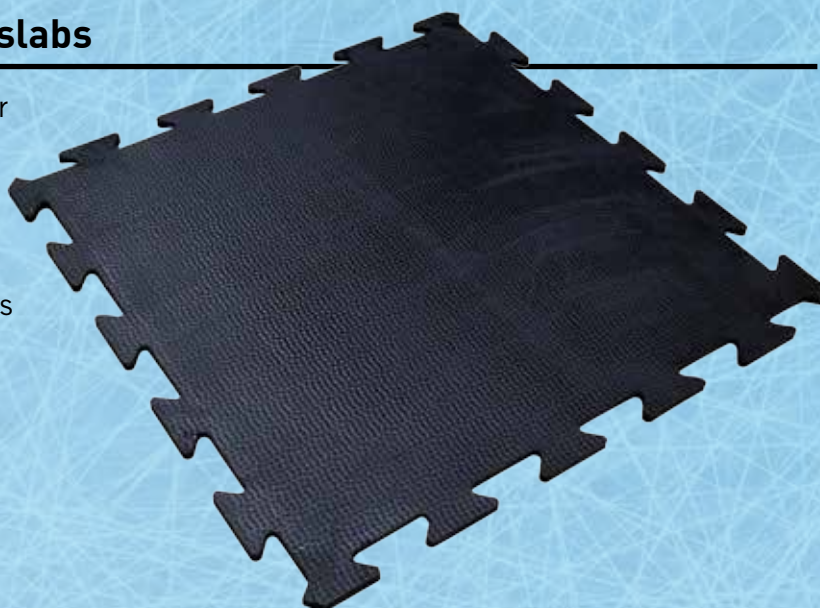

*Clip 18 / Upper surface*



*Clip Super / Upper surface*



*Inner surface*

### CLIP 18 and CLIP SUPER :

Reference	Dimensions	Thickness	Weight	Fire classification
CLIP18	1000 x 1000 mm	17 mm	23 kg/m <sup>2</sup>	Efl
CLIP18CFL	1000 x 1000 mm	17 mm	23 kg/m <sup>2</sup>	Cfl-S1
CLIP18BFL	1000 x 1000 mm	17 mm	23 kg/m <sup>2</sup>	Bfl-S1
CLIPSUPER	1000 x 1000 mm	18 mm	21 kg/m <sup>2</sup>	-
CLIPSUPERCFL	1000 x 1000 mm	18 mm	21 kg/m <sup>2</sup>	Cfl-S1
CLIPSUPERBFL	1000 x 1000 mm	18 mm	21 kg/m <sup>2</sup>	Bfl-S1

### CLASSIQUE : (without interlocking)

Width	Length	Thickness	Weight
100 cm	150 - 165 - 175 - 185 - 200 - 220 cm	17 mm	23 kg/m <sup>2</sup>
110 cm	150 - 165 - 175 - 185 - 200 - 220 cm	17 mm	23 kg/m <sup>2</sup>
120 cm	150 - 165 - 175 - 185 - 200 - 220 cm	17 mm	23 kg/m <sup>2</sup>
125 cm	150 - 165 - 175 - 185 - 200 - 220 cm	17 mm	23 kg/m <sup>2</sup>



On request



On request



Outdoor



for laying



Interlocking  
slabs




>1000  
passages / day



Use up to  
-40°C



UV resistant



100%  
rubber



Draining



High pressure  
washing



Cleaning by  
single brush



# SOLID SPORT

## Rubber slabs for ice rinks

**Composition :** 100% rubber

### Advantages:

- High resistance to ice skates
- Robust and not sensitive to water
- Esthetics and decorative
- Bi-layers slabs: shock absorbent lower layer and highly wear resistant top layer
- Heat and sound insulation
- Cleaning with single disc machine

### Layout:

Fully glued with bi-components polyurethane glue

### + info :

- Other thickness on request
- Custom colours upon request (mini 150 m<sup>2</sup>)



### Standard colours:



32 Dark grey



110 Medium grey



13 Light grey



30 Red



114 Blue



144 Green

### Other colours: Minimum of quantity 100 m<sup>2</sup>



103 Pistachio green



111 Beige



117 Brown



146 Mint



512 Garnet

Dimensions	Thickness	Weight	Fire classification
100 x 100 cm	9 mm	13 kg/m <sup>2</sup>	Bfl-S1




Indoor



for gluing



Intensive traffic  
>1000 passages / day



100% RUBBER

100% rubber




Use up to  
-40°C



Bfl-S1



High pressure  
washing



Cleaning by  
single brush



# SPORTNEIGE / ID NEIGE

## Sports floor covering

**Composition :** 85% recycled black rubber, 15% coloured EPDM grains


### Advantages:

- Robust and not sensitive to water
- Esthetics and decorative
- Absorbs shocks
- Heat and sound insulation
- Cleaning with single disc machine


### Layout:

Fully glued with bi-components polyurethane glue

+ **info :** Other thickness on request

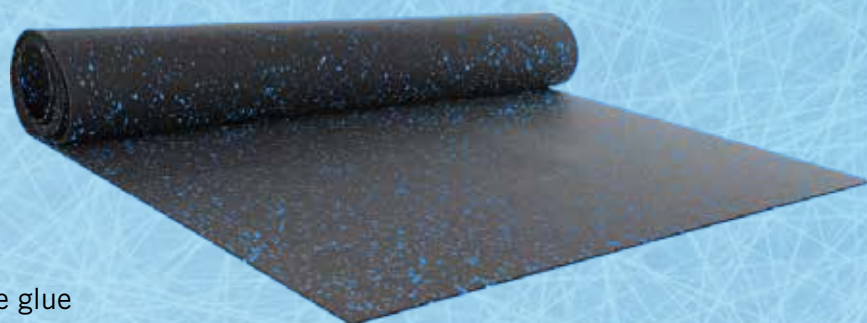


### SPORTNEIGE :

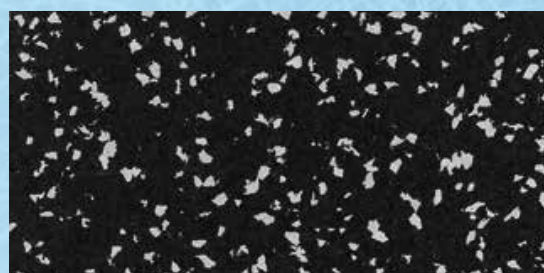

*Black / grey*

### Other colours on request

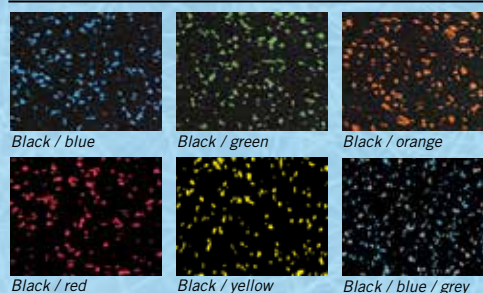


### ID NEIGE :



*Black / blue*

### Other colours on request



Reference	Dimensions	Thickness	Weight	Fire classification
SPORTNEIGE6	1,5 x 20,0 m	6 mm	6,3 kg/m <sup>2</sup>	Efl
SPORTNEIGE10	1,5 x 12,0 m	10 mm	10,5 kg/m <sup>2</sup>	Efl
IDNEIGE6	1,5 x 20,0 m	6 mm	6,3 kg/m <sup>2</sup>	Efl
IDNEIGE10	1,5 x 12,0 m	10 mm	10,5 kg/m <sup>2</sup>	Efl
81104 (black)	1,5 x 30,0 m	4 mm	4,0 kg/m <sup>2</sup>	-
81106 (black)	1,5 x 20,0 m	6 mm	6,0 kg/m <sup>2</sup>	-
811010 (black)	1,5 x 12,0 m	10 mm	10,0 kg/m <sup>2</sup>	-





# DELINEIGE

## The flooring at the summit

### Composition :

Speckled Délineige: 35% EPDM rubber (black)  
65% EPDM (coloured grain)


### Advantages:

- Robust and not sensitive to water
- Extremely resistant to wear, ageing and UV
- Excellent resistance to mechanical stress
- Esthetics and decorative
- Absorbs shocks
- Heat and sound insulation
- Cleaning with single disc machine


**Layout:** Fully glued with bi-components polyurethane glue

+ **info :** Other thickness on request

Reference	Dimensions	Thickness	Weight	Fire classification
SPECKLED DÉLINEIGE				
DELINEIGE4	1,25 x 30,0 m	4 mm	4,4 kg/m <sup>2</sup>	Cfl-S1
DELINEIGE6	1,25 x 20,0 m	6 mm	7,5 kg/m <sup>2</sup>	Cfl-S1
DELINEIGE8	1,25 x 15,0 m	8 mm	10,0 kg/m <sup>2</sup>	Cfl-S1
DELINEIGE10	1,25 x 12,0 m	10 mm	12,5 kg/m <sup>2</sup>	Cfl-S1
PLAIN DÉLINEIGE (ON REQUEST)				
DELINEIGE4 (plain)	1,25 x 30,0 m	4 mm	4,38 kg/m <sup>2</sup>	Cfl-S1
DELINEIGE6 (plain)	1,25 x 20,0 m	6 mm	6,57 kg/m <sup>2</sup>	Cfl-S1
DELINEIGE8 (plain)	1,25 x 15,0 m	8 mm	8,76 kg/m <sup>2</sup>	Cfl-S1
DELINEIGE10 (plain)	1,25 x 12,0 m	10 mm	10,95 kg/m <sup>2</sup>	Cfl-S1

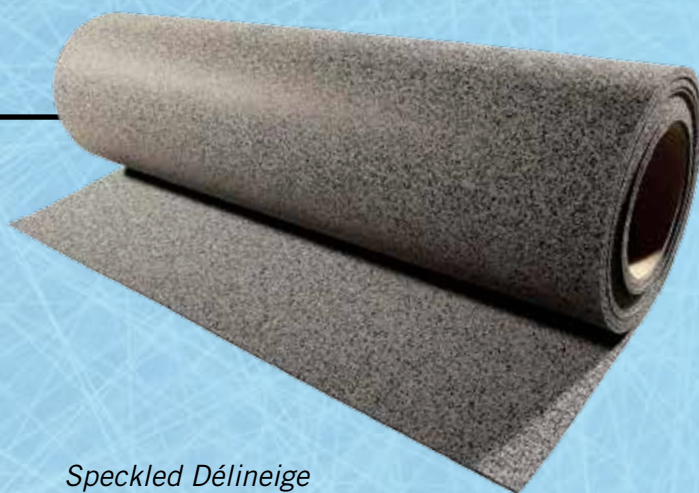

*Speckled Délineige*

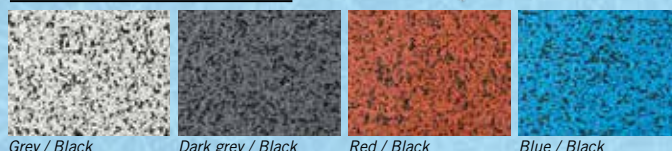

Grey / Black

Dark grey / Black

Red / Black

Blue / Black

*Plain Délineige (on request)*



Red

Blue

Dark grey

Beige

Green



Outdoor




Indoor



for gluing



Cfl-S1



100%  
rubber



High pressure  
washing



Use up to  
-40°C



UV resistant

# POLYURETHANE GLUE

## Bi-components polyurethane glue

### Composition :

Polyurethane (5.0 kg) + hardener (0.7 kg)

### Applications :

For all indoor or outdoor rubber floor coverings in slabs or rolls, carpets and synthetic turf.

### Advantages:

- Suitable for gluing to many supports and for coatings such as concrete and breeze blocks.
- Recommended for intensive use.
- May be subject to wide temperature variations by its flexibility.

### Layout:

Polymerization time at 5°C minimum: after 24 hours for opening to foot traffic, after 48 to 72 hours for intense traffic.



### Approximate glue consumption

Sportneige	1 to 1,2 kg/m <sup>2</sup>
ID Neige	1 to 1,2 kg/m <sup>2</sup>
Checker	0,7 to 0,8 kg/m <sup>2</sup>
Pastillé	0,7 to 0,8 kg/m <sup>2</sup>



# CHECKER

## Industrial rubber coating

**Composition :**  
100% natural rubber

**Advantages:**

- Anti-slip
- Robust and not sensitive to water
- High resistance to abrasion
- Matted underside for adhesive laying

**Layout:** Fully glued with bi-components polyurethane glue

**Colours:** Black

**+ info :** nitrile version on request



Outdoor



Indoor



for gluing



100%  
RUBBER  
100%  
rubber



Cleaning by  
single brush



Use up to  
-40°C



UV resistant

Reference	Dimensions	Thickness	Weight	Fire classification
CHECKER140N6	1,4 x 10,0m	6 mm	8,4 kg/m <sup>2</sup>	-

# COIN MAT

## Coin pattern flooring

**Composition :**  
100% natural rubber


**Advantages:**

- Robust and not sensitive to water
- High resistance to abrasion
- Matted underside for adhesive laying

**Layout:** Fully glued with bi-components polyurethane glue

**Colours:** black or grey - Other colours on request

**+ info :** nitrile version on request

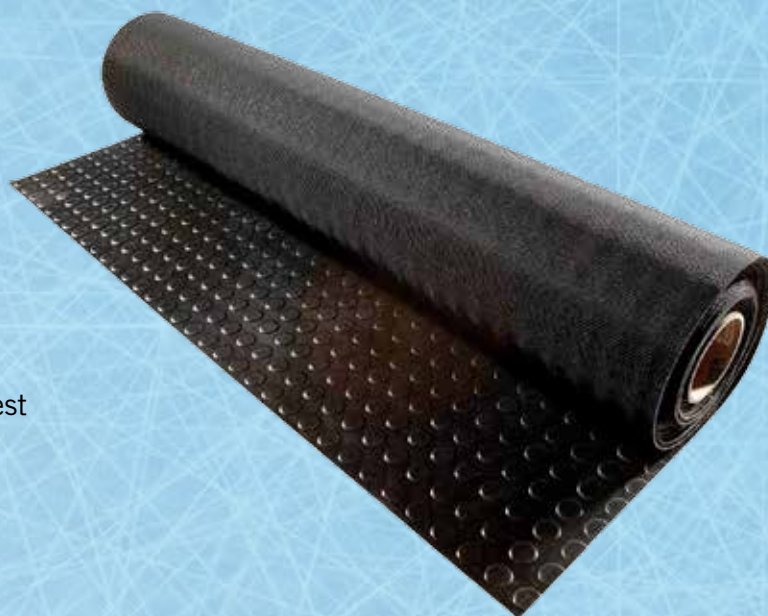

Black



Grey

Reference	Dimensions	Thickness	Weight	Fire classification
PAST100N3 (black)	1,0 x 10,0m	3 mm	3,8 kg/m <sup>2</sup>	-
PAST120N3 (black)	1,2 x 10,0m	3 mm	3,8 kg/m <sup>2</sup>	Cfl-S1
PAST120G3 (grey)	1,2 x 10,0m	3 mm	4,6 kg/m <sup>2</sup>	-



Outdoor



Indoor



for gluing



Cfl-S1  
Ref:  
PAST120N3



100%  
RUBBER



Cleaning by  
single brush



Use up to  
-40°C



UV resistant



# RUBBER GRATINGS M25


Ultra-tough grating, specially designed to meet disabled standards



**Composition :** 100% non-recycled natural rubber

## Advantages:

- Model conforming to the disabled standard LOGC940024A
- Highly anti-slip: fine edges over the entire surface
- Very robust thanks to its density
- Upper face allowing total water and snow drainage
- Resistant to ice skates cuts
- Long lifetime
- Bevelled edges to facilitate access (M2606)

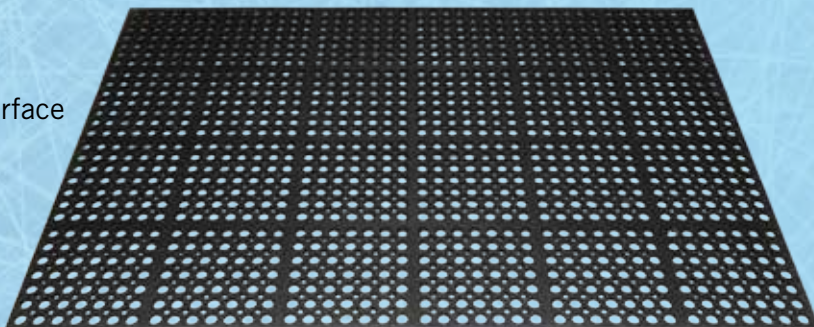

**Colours:** black - Other colours on request

## + info :

- Custom cutting
- Cfl-S1 and Bfl-S1 fire classification upon request

Reference	Dimensions	Thickness	Weight	Fire classification
M25	1000 x 1500 mm	22 mm	21,8 kg	-
M2606	980 x 1570 mm	22 mm	20,0 kg	-



Outdoor



for laying



>1000  
passages / day

100%  
RUBBER

100%  
rubber



Draining



Use up to  
-40°C



UV resistant



High pressure  
washing

# RUBBER ROLLS

Wide rubber rolls


**Composition :** 100% rubber

## Advantages:


- Very anti-slip
- Soundproofing
- Resistant to ice skates cuts
- Long lifetime
- Resilient to heavy loads

**Colours:** Black

**+ info :** custom cutting



Upper surface



Inner surface



Outdoor



>1000  
passages / day



100%  
RUBBER

100%  
rubber



Use up to  
-40°C



UV resistant



High pressure  
washing

Reference	Designation	Dimensions	Thickness	Weight
IDSSHEET4MM	SBR rubber 1 slick surface / 1 fabric printing surface - 1 ply	2,0 x 60,0 m	4 mm	5,28 kg/m <sup>2</sup>
IDS6200	SBR rubber 1 hammered surface / 1 fabric printing surface	2,0 x 50,0 m	6 mm	9,4 kg/m <sup>2</sup>
IDS10150	SBR rubber 1 hammered surface / 1 fabric printing surface	1,5 x 50,0 m	10 mm	14,0 kg/m <sup>2</sup>
IDS10180	SBR rubber 1 hammered surface / 1 fabric printing surface	1,8 x 50,0 m	10 mm	14,0 kg/m <sup>2</sup>
IDS10TOILE	SBR rubber 1 hammered surface / 1 fabric printing surface - 1 ply	1,8 ou 2,4 x 50,0 m	10 mm	12,0 kg/m <sup>2</sup>
IDS12	SBR rubber 1 hammered surface / 1 slick surface	2,0 x 50,0 m	12 mm	13,9 kg/m <sup>2</sup>
IDS16	SBR rubber 1 hammered surface / 1 slick surface	2,0 x 50,0 m	16 mm	17,6 kg/m <sup>2</sup>



# TAPILOGO

## The professional grade personalized mat

**Composition :** 100% polyamide fiber on 100% nitrile rubber soles


### Advantages:

- Extremely sturdy and efficient
- Anti-slip soles
- Long lasting colours thanks to deep ink projection inside fibers (jet print technic)
- Excellent oil resistance
- Reinforced edges
- Suitable for industrial laundry
- Possibility to use 16 different colours on your Jet Print TAPILOGO mat

**Colours:** see swatch

### + Info :

For optimum quality, please send us a vector file (AI, EPS, PDF or SVG) CMYK. If not, send us a high-definition JPG file.

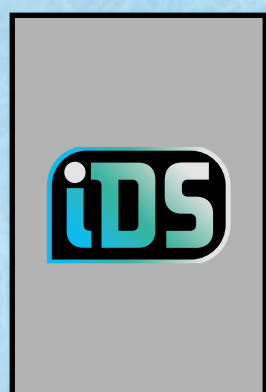

*Portrait*



*Landscape*

### Standard dimensions : (with edges)

Reference	Dimensions	Thickness	Weight
TAPILOGO4060	400 x 600 mm	6 mm	0,5 kg
TAPILOGO6080	600 x 800 mm	6 mm	1,0 kg
TAPILOGO85120	850 x 1200 mm	6 mm	2,3 kg
TAPILOGO85150	850 x 1500 mm	6 mm	3,0 kg
TAPILOGO115175	1150 x 1750 mm	6 mm	4,9 kg
TAPILOGO115200	1150 x 2000 mm	6 mm	5,5 kg
TAPILOGO115240	1150 x 2400 mm	6 mm	7,0 kg
TAPILOGO150240	1500 x 2400 mm	6 mm	9,2 kg

### Custom dimensions : (with edges)

Reference	Dimensions	Thickness	Weight
TAPILOGOS-MESUREAB	1500 x 5000 mm (maxi)	6 mm	2,5 kg/m <sup>2</sup>

### SWATCH: Maximum 16 colours per mat



Indoor



for laying



Washing machine 40°C



Intensive traffic



# CLEANFOR

## The professional grade mat

**Composition :** 100% polyamide fiber  
on 100% nitrile rubber soles


### Advantages:

- Extremely sturdy and efficient
- Anti-slip soles
- Excellent oil resistance
- 2 kind of soles: slick soles for hard floors or pinned soles (max: 150 x 400cm) for carpet floors
- Reinforced edges
- Suitable for industrial laundry


**Colours:** see swatch



### SPECKLED COLOURS:



050 Anthracite




675 Mink brown




711 Royal blue



681 Silver grey




000 Brown



646 Pearl



652 Red



647 Granit

### Standard dimensions : (with edges)

Width	Length	Thickness	Weight
85 cm	60, 75, 115, 150, 300 cm	10 mm	2,7 kg/m <sup>2</sup>
115 cm	180, 200, 240, 250, 300 cm	10 mm	2,7 kg/m <sup>2</sup>
150 cm	200, 240, 250, 300 cm	10 mm	2,7 kg/m <sup>2</sup>
200 cm*	200, 300 cm	10 mm	2,7 kg/m <sup>2</sup>

\* Only in anthracite and pearl grey


### Custom dimensions : (with edges)

Width	Length	Thickness	Weight
up to 150 cm	up to 550 cm	10 mm	2,7 kg/m <sup>2</sup>
up to 200 cm*	up to 550 cm	10 mm	2,7 kg/m <sup>2</sup>

\* Only in anthracite and pearl grey

Maximal dimension for pinned soles: 175 x 550 cm


### MONOTONE COLOURS:




013 Holly




157 Sahara



875 Raven Black




964 Terra Cotta




014 Cool Grey



040 Scarlet




880 Burgundy



005 Coffee




134 Regal Red




178 Pearl




858 Navy



952 Chocolate



012 Slate



047 Smokey Mount



474 Ocean Blue



959 Taupe

### Dimensions : (with edges)

Width Standards	Length Standards	Custom length	Thickness	Weight
85, 115, 150 cm	up to 400 cm	400 cm to 600 cm	11 mm	2,6 kg/m <sup>2</sup>

Maximal dimension for pinned soles: 150 x 400 cm



Indoor



for laying



Cfl-S1



Washing machine 60°C



>1000 passages / day  
Intensive traffic





## **Alpespace**

47, voie St Exupéry  
73800 FRANCIN  
FRANCE

—

tél. +33 (0)4 79 84 36 06  
fax : +33 (0)4 79 84 36 10

—

e-mail : [ids@ids-france.net](mailto:ids@ids-france.net)  
web : [www.ids-france.net](http://www.ids-france.net)

**[www.ids-france.net](http://www.ids-france.net)**

## **5,000 M<sup>2</sup> OF STORAGE AT THE HEART OF THE ALPS**

—

**Skating rinks**

**Reception**

**Passageways**

**Staircases**

**Catwalks**

**Ramps**

**Locker rooms**

