

DÉLINEIGE

The coating at the summit

Composition :

Speckled Délineige: 35% EPDM rubber (black) 65% EPDM (coloured grain)

Plain colour Délineige: 100% coloured EPDM


Advantages:

- Robust and insensitive to water
- High resistance to wear, ageing and UV.
- Excellent resistance to stresses and mechanical influences
- Good looking and decorative
- Absorbs shocks
- Heat and sound insulation
- Cleaning with single disk machine

Laying: Glued flat with polyurethane glue.

Colour: Speckled or plain (see colour chart)

Plain Délineige (on request)

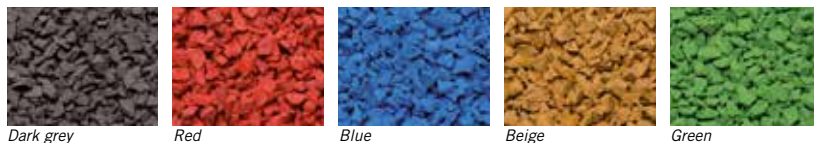

Dark grey

Red

Blue

Beige

Green




Speckled Délineige



Dark grey / Black

Medium grey / Black

Light grey / Black



Red / Black

Blue / Black

Reference	Dimensions	Thickness	Weight	Fire classification
SPECKLED DÉLINEIGE				
DELINIEIGE6	1,25 x 20,0 m	6 mm	8,0 kg/m ²	Cfl-S1
DELINIEIGE8	1,25 x 15,0 m	8 mm	10,0 kg/m ²	Cfl-S1
DELINIEIGE10	1,25 x 12,0 m	10 mm	12,5 kg/m ²	Cfl-S1
PLAIN DÉLINEIGE (on request)				
DELINIEIGE4 (plain)	1,25 x 30,0 m	4 mm	4,38 kg/m ²	Cfl-S1
DELINIEIGE6 (plain)	1,25 x 20,0 m	6 mm	6,57 kg/m ²	Cfl-S1
DELINIEIGE8 (plain)	1,25 x 15,0 m	8 mm	8,76 kg/m ²	Cfl-S1
DELINIEIGE10 (plain)	1,25 x 12,0 m	10 mm	10,95 kg/m ²	Cfl-S1



Outdoors



Indoors



for gluing



Cfl-S1



100% rubber



High pressure washing



Use up to -40°C



UV resistant