

# PASTILLÉ

## Studded coating

**Composition :**  
100% natural rubber


**Advantages:**

- Anti-slip
- Robust and insensitive to water
- High resistance to abrasion
- Matt underside for adhesive laying

**Laying:** Glued flat with polyurethane glue.

**Colour:** black or grey - Other colours on request

**+ info :** Nitrile version on request

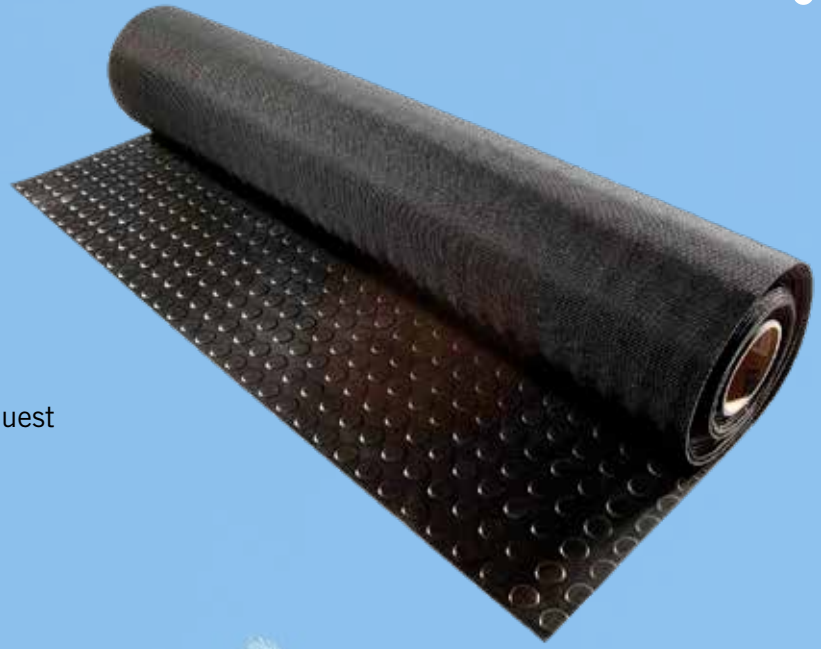

Black



Grey

| Reference         | Dimensions  | Thickness | Weight                | Fire classification |
|-------------------|-------------|-----------|-----------------------|---------------------|
| PAST100N3 (black) | 1,0 x 10,0m | 3 mm      | 3,9 kg/m <sup>2</sup> | -                   |
| PAST120N3 (black) | 1,2 x 10,0m | 3 mm      | 3,9 kg/m <sup>2</sup> | Cfl-S1              |
| PAST120G3 (grey)  | 1,2 x 10,0m | 3 mm      | 3,9 kg/m <sup>2</sup> | -                   |

|             |                          |                 |              |
|-------------|--------------------------|-----------------|--------------|
|             |                          |                 |              |
| Outdoors    | Indoors                  | for gluing      | Cfl-S1       |
|             |                          |                 |              |
| 100% RUBBER | Cleaning by single brush | -40°C           | UV resistant |
| 100% rubber |                          | Use up to -40°C |              |

# CHECKER

## Industrial rubber coating

**Composition :**  
100% natural rubber

**Advantages:**

- Anti-slip
- Robust and insensitive to water
- High resistance to abrasion
- Matt underside for adhesive laying

**Laying:** Glued flat with polyurethane glue.

**Colour:** black or grey - Other colours on request

**+ info :** nitrile version on request



Black



Grey

| Reference                 | Dimensions  | Thickness | Weight                | Fire classification |
|---------------------------|-------------|-----------|-----------------------|---------------------|
| CHECKER100N3 (black)      | 1,0 x 10,0m | 3 mm      | 4,3 kg/m <sup>2</sup> | -                   |
| CHECKER140N3 (black)      | 1,4 x 10,0m | 3 mm      | 3,6 kg/m <sup>2</sup> | -                   |
| CHECKER140N6 (black)      | 1,4 x 10,0m | 6 mm      | 8,7 kg/m <sup>2</sup> | Cfl-S1              |
| CHECKER140G3 (grey)       | 1,4 x 10,0m | 3 mm      | 3,8 kg/m <sup>2</sup> | -                   |
| CHECKER140N3NBR (nitrile) | 1,4 x 10,0m | 3 mm      | 3,9 kg/m <sup>2</sup> | -                   |

|            |                          |                 |              |
|------------|--------------------------|-----------------|--------------|
|            |                          |                 |              |
| Outdoors   | Indoors                  | for gluing      | 100% RUBBER  |
|            |                          |                 |              |
| Cfl-S1     | Cleaning by single brush | -40°C           | UV resistant |
| Ref: 140N6 |                          | Use up to -40°C |              |