

IDS6 and IDS10T

Mat in roll for passageways and milking rooms

1 Fixing elements

The mat can be laid loose. In case of fixing, use stainless steel knock-in screw (HIT8-30/80), stainless steel washers (10 x 30 mm) and dowels.

2 Storage

If mats are not installed immediately, it is better to shelter them from light and bad weather. Before starting the installation, make sure that the temperature is between 8 °C and 30 °C.

3 Support

The support for the mats shall be rigid enough (concrete or asphalt) and shall have an even surface so that the mat rests on all of it. The surface will ideally have a slope to allow the evacuation of liquids.

Before laying, clean up the support and let it dry.

4 Laying


Mats shall be laid keeping a distance of 2 cm on their borders to allow expansion. This spacing can be filled with a silicone joint.

Unroll the soft bed with its hammered side on top. To prevent tensions, it is better to keep the mat unrolled for one day in the barn so that it warms up to the ambient temperature.

Fastening is ensured at the front with one screw every linear meter. It is advised to start at the center of the mat and move towards its extremities. Drill the support using the appropriate 8 mm drill bit, put the dowel then put the screw trying not to crush the mat too much. If you need to cut the mat (pole, edge...), use a hole saw or a jigsaw.

5 Maintenance

Mats can be scraped using a hand scraper and cleaned with a water jet cleaner or a high-pressure cleaner (do not exceed 60 bars and 30 °C).

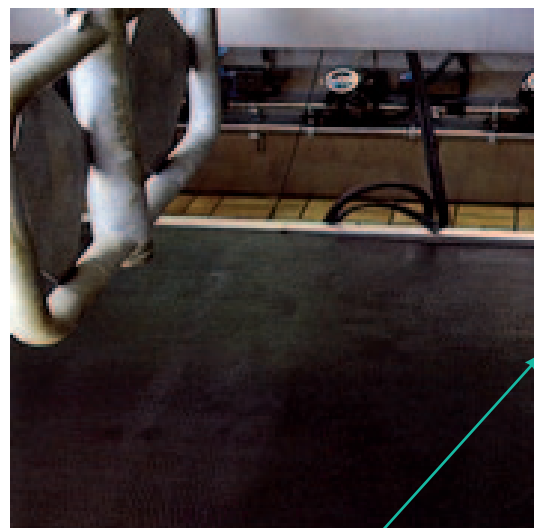

Keep a void of a few millimeters along the mat for the expansion